

Completed By:

Highline Pre-Delivery Inspection Checklist CFR650

	Dealership:	
	Technician:	C-Holling Sale Fre on the
	Customer Name:	
	Model:	
	Serial #:	
	Estimated Setup Time: 2 hours	
Specs:		☐ Secure the hydraulic hose holder to the front of the
	Have the correct options been installed on the unit	frame.
	as per the order?	☐ Ensure guard rod adjustment is free for operation.
		☐ Ensure flail drum lock engages and disengages.
Safety:		☐ Ensure twine cutter and be passed through across drum
	Owner's manual located in the designated holder.	and stored properly.
	Ensure all safety decals are in place and legible.	☐ Ensure all manual operated adjustments function proper
	Safety locks are functional and in place.	and freely.
	Safety chain inspection (refer to manual).	 Feed rollers are set low on right and high on left (front and rear).
	Safety lights and slow moving vehicle sign are	Ensure belt tensions are set correctly (manual specs) (if
	functional and visible.	applicable).
Obook I	ina	☐ Check sprocket alignment and chain tension on Grain
Check List: (Refer to operator's manual for instructions).		Tank (if applicable).
ingigr i	v vperator 5 manuai ivr mstructivnsj.	☐ Check clean-out door can move freely (if applicable).
	Domovo chinning blocks	☐ Check tank lid for proper function (if applicable).
	Remove shipping blocks. Wash the unit, removing all road debris (road salt	Onevestional Observ
	and other material).	Operational Check:
	Check for aesthetic defects and shipping damage –	☐ Cycle all cylinders a minimum of three times, check for
	replace damaged items or touch up paint as	leaks and clearance.
	required.	☐ Cycle feed roller rotation.
	Check wheel bolts, as per manual specs.	\Box Check that the grain tank clutch engages (if applicable).
	Check wheel bearings, ensure bearings are	$\ \square$ Check back up clutch operates freely in reverse and locks
	properly reloaded and nut, washer and cotter pins	up forward (if applicable).
	are in place.	☐ Engage PTO, ensure operation.
	Check tire pressure and adjust as required.	Customer Review:
	Lubricate areas and chains as per manual	ouotomor norion.
	specifications.	$\ \square$ Review with the customer the understanding and
	Check oil level in gear box (addition gear box with	operation of the machine.
	grain tank).	☐ Review with the customer the safety section of the
	Remove the forks and install (Fig.1 & Fig. 2).	Operator's Manual.
	Remove safety lock, hose holder and driveline	Comments:
_	from shipping position. (Fig. 3)	
	Remove the shipping brackets (Fig.4). Shipping	
	brackets can be discarded.	

Signature:

Date:



Support Pictures:

Figure 1



Figure 2

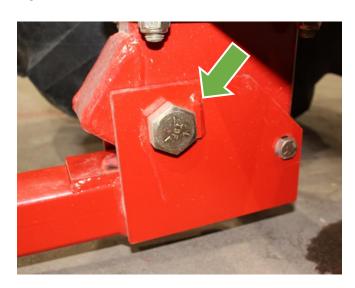


Figure 3



Figure 4

