

# Bale Pro<sup>®</sup>

Complete Feed Ration  
Feed Chopper<sup>™</sup> 650

---

O p e r a t o r s M a n u a l



# **Feed Chopper™ for the BalePro® Complete Feed Ration 650**

## **Operator's Manual**

Highline Manufacturing Limited  
HWY #27, P.O. Box 307  
Vonda, SK S0K 4N0  
Canada  
Phone: 306.258.2233  
Fax: 306.258.2010  
Toll Free: 1.800.665.2010

E11478V2\_B

Highline Manufacturing Ltd.

Feed Chopper on the CFR 650 (FC 650)

### **Highline Team Message**

***Congratulations on your purchase of the Feed Chopper for the Complete Feed Ration 650 (FC 650) manufactured by Highline Manufacturing Ltd.***

*This operator's manual has been prepared to provide information necessary for the safe and efficient operation of your Feed Chopper. In the manual you will find safety procedures, maintenance routines and detailed operational instructions.*

*If you find that you require information not covered in this manual, please feel free to consult your local dealer. Your dealer is always able to contact Highline for this technical information.*

*Highline Manufacturing Ltd. thanks and congratulates you for selecting a Feed Chopper for the Complete Feed Ration 650 as your machine of choice.*

*Highline Manufacturing Ltd.*

# Table of Contents

General Description of the Feed Chopper  
Intended Use of the Feed Chopper

## Section 1 - Safety

Serial Number .....	1
Safety Sign-off Form .....	2
Safety Alert Symbol .....	3
General Safety .....	4
Safety Decals .....	4
Safety Decal Locations .....	7

## Section 2 - Feed Chopper Preparation

Park the tractor and CFR 650 on level ground .....	1
Check the condition of the knives .....	1
Clear the rotor area of any material buildup .....	2
Ensure all the drive shields are in place and in good repair .....	3
Discharge Door Setup For Feed Chopper Operation .....	3
Discharge Door Setup For CFR 650 Operation Only .....	4

## Section 3 - Operating the Feed Chopper

Operating With the Feed Chopper .....	1
Operating Without the Feed Chopper .....	6
Unplugging the Feed Chopper .....	9

## Section 4 - Maintaining the Feed Chopper

Lubrication .....	1
Greasing the CFR 650 Rear Flail Drum Bearing .....	2
Twine Cutter Access .....	2
Knife Replacement .....	2
Belt Tension Adjustment .....	3
Rotor Twine Scraper Adjustment .....	3

## Section 5 - Troubleshooting

This Page Left Blank

## **GENERAL DESCRIPTION OF THE FEED CHOPPER**

The Feed Chopper is an attachment to the Complete Feed Ration 650 (FC 650). When the Feed Chopper is engaged, it uses power from the flail drum of the CFR 650 to run a belt drive for the Feed Chopper rotor.

When additional processing and chopping of feed material is desired, the Feed Chopper clutch is engaged and the Feed Chopper door is moved to direct material from the CFR 650 into the Feed Chopper. This further chops the material before discharging it. The CFR 650 must be turned off when the Feed Chopper drive clutch is engaged and the discharge door is positioned.

When the Feed Chopper clutch is not engaged and when the Feed Chopper door is in the by-pass position, the CFR 650 discharges material without any additional chopping.

The operator of the CFR 650/Feed Chopper is located in the tractor cab to control the speed of driving and the speed of operation of the CFR 650/Feed Chopper.

## **INTENDED USE OF THE FEED CHOPPER**

The Feed Chopper is designed to further process and chop animal feed materials that have been initially processed from a round bale by the CFR 650.

The Feed Chopper is designed to further process animal feed and bedding materials that have been initially processed from a round bale.

The Feed Chopper is intended for use in farming applications.

The Feed Chopper is intended for off road use only.

The Feed Chopper is intended for use in locations away from people who could be harmed by the discharged materials.

Any uses of the Feed Chopper other than the above stated Intended Uses shall be considered misuse of the Feed Chopper. This misuse shall include (but not limited to):

- Using the Feed Chopper in non-farming applications
- Using the Feed Chopper on public roads
- Using the Feed Chopper around people or in public places
- Chopping materials other than animal feed materials
- Chopping materials that have not been initially processed by the CFR 650

Always use the Feed Chopper according to the instructions contained in this Operator's Manual and on the safety and instruction decals on the machine.

Perform regular maintenance and repair to ensure that the Feed Chopper operates safely and efficiently.

This Page Left Blank

## **SERIAL NUMBER**

Your serial number is found on the serial number plate attached to the Feed Chopper on the top bar.



Serial Plate Location

215057C

It is important to record the serial number for proof of ownership and for any service or maintenance assistance.

**Serial Number**

---

**Owner**

---

**Model**

---

**Date of Purchase**

---

**SAFETY SIGN-OFF FORM**

Highline Manufacturing Ltd. follows the general Safety Standards specified by the American Society of Agricultural Engineers (ASAE) and the Occupational Safety and Health Administration (OSHA). Anyone who will be operating and/or maintaining the Feed Chopper 650 should read and clearly understand all Safety, Operating and Maintenance information presented in this manual.

Do not operate or allow someone to operate this equipment until this information has been reviewed. This information should be reviewed by all operator's before the season start-up.

This sign-off sheet is provided for record keeping to indicate that the person working with the equipment has read and understood the information in the Operator's Manual and has been instructed in the safe operation of the equipment.

Date	Employee's Signature	Employer's Signature

## SAFETY ALERT SYMBOL

The Safety Alert Symbol means . . .



**ATTENTION!  
BECOME ALERT!  
YOUR SAFETY IS INVOLVED!**

The Safety Alert Symbol combined with a Signal Word alert to the presence of a hazard and the degree of possible injury.



Indicates an imminently hazardous situation that, if not avoided, **WILL** result in **DEATH OR SERIOUS INJURY**. The color is Red with White lettering.



Indicates a potentially hazardous situation that, if not avoided, **COULD** result in **DEATH OR SERIOUS INJURY**, and includes hazards that are exposed when guards are removed or unsafe practices. The color is Orange with Black lettering.



Indicates a potentially hazardous situation that, if not avoided, **MAY** result in **MINOR INJURY**. The color is Yellow with Black lettering.

### **GENERAL SAFETY**

1. Ensure that anyone who is going to operate, maintain or work near the Feed Chopper 650 is familiar with the recommended operating, maintenance procedures and safety information contained in this manual and follows all the safety precautions.
2. In addition to the design and configuration of the equipment, hazard control and accident prevention are dependant upon the awareness, concern, prudence and proper training of personnel involved in the operation, transport, maintenance and storage of this equipment.  
(Adapted from ASAE S474.1 Feb 04 - 5.2.5.1)
3. The Feed Chopper 650 shall not be operated without all the guards in place.


### **SAFETY DECALS**

1. Keep the decals and signs clean and legible at all times.
2. Replace decals and signs that are damaged, missing or have become illegible.
3. Parts that have been replaced should display a current decal.
4. Decals are available from the Parts Department.
5. Be familiar with the decals, the type of warning and the area or function(s) related to the area(s) that requires your awareness.



### **DO NOT CONTACT THE ROTATING DRIVELINE**

Contact with rotating driveline will cause serious injury or death.  
Keep all driveline guards in place.  
Securely attach drivelines at both ends.  
Check that the driveline guards turn freely on driveline.



### **DO NOT CONTACT ROTATING BLADES**

Rotating blades will cause serious injury or death.  
Before servicing or adjusting, disengage power take off, shut of the tractor, remove key, set park brake.  
Before servicing or adjusting, wait for all parts to stop rotating.  
Keep guards in place and in good condition.



### **KEEP PEOPLE AND ANIMALS CLEAR OF THE DISCHARGE AREA**

Discharge material exits at a high speed.  
Discharged material will cause serious injury or death.  
Stand clear of Feed Chopper when it is engaged.



### **SHUTDOWN THE TRACTOR BEFORE DISMOUNTING TRACTOR**

Shut down the tractor and remove the key before repairing, servicing, lubricating or cleaning the Feed Chopper.




### DO NOT OPERATE WITH SHIELDS MISSING

Contact with the moving belt or sheaves may cause serious injury or death.

Keep shields fastened in place.

Keep away from moving parts.

Do not stand or climb on the machine when operating.

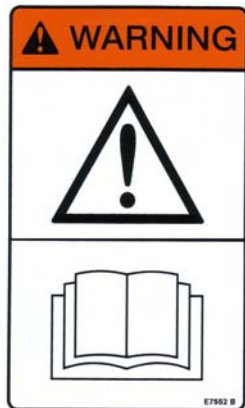

### READ, UNDERSTAND AND FOLLOW SAFETY INSTRUCTIONS

Read, understand and follow all instructions and safety messages included in this manual and on decals attached to the machine.

These instructions and safety messages contain important information.

Allow only responsible, properly instructed individuals to operate and service the machine.

Failure to follow the instructions and safety messages in this manual and on the decals attached to the machine could result in serious injury or death.


Keep all safety and instruction decals in good condition. Replace any missing or damaged decals.

### CHECK CONDITION OF THE KNIVES BEFORE OPERATING


Check that all the knives are in place and in good condition.

If any vibration is detected during operation, immediately stop the machine and determine the source of the vibration before resuming.

Operating the Feed Chopper with knives missing or rotor out of balance could result in injury or death.

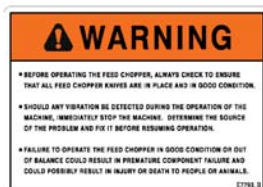

# SAFETY DECAL LOCATIONS

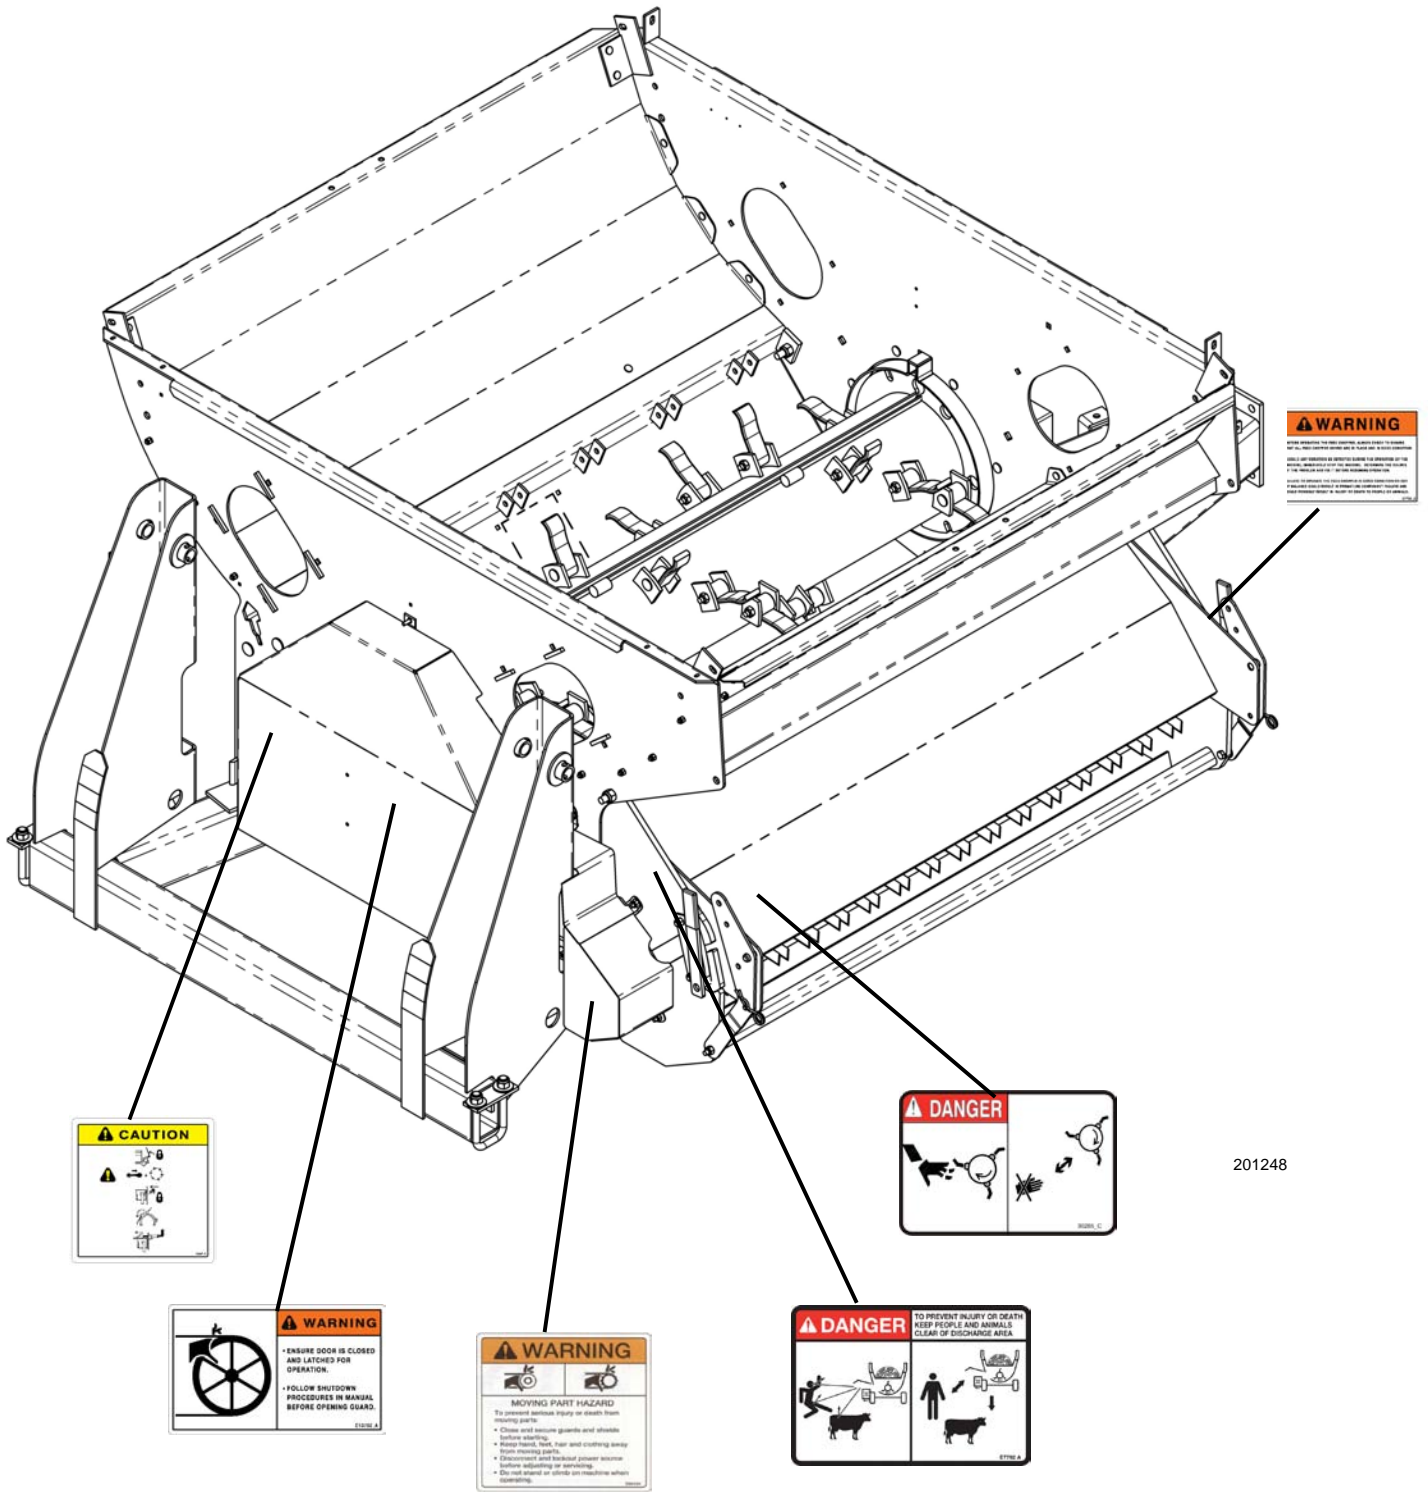

201248

This Page Left Blank

### 2.0 FEED CHOPPER 650 PREPARATION

#### General Preparation

1. Park the tractor and CFR 650 on level ground.
  - Engage the tractor parking brake.



Park On Level Ground

201249


2. Shut off the tractor engine and remove the key.

3. Check the condition of the knives.



Disconnect the PTO driveline from the tractor.

Do not place hands in the chopper when it is rotating. Contact with exposed rotating blades will cause serious injury or death.

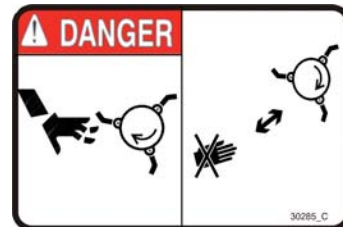

- Disengage the chopper clutch pin from the flail drum drive plate. (See Section 3 for procedures.)
- Spin the rotor by hand to check all the knives.
  - Check if they are broken or worn to the point that they would not process the material properly.
- See the Section 4 - "Maintaining the Feed Chopper" for knife replacement information.



Check Condition of the Knives

201249

## Section 2 - Feed Chopper 650 Preparation

4. Clear the rotor area of any material buildup.

- Disconnect the discharge door supports by removing the hairpins and removing the door from the support holes.



Disconnect Discharge Door Supports

201238


- Remove the discharge door by sliding the door hinge from the slots.
- Clear the chopping area and the knives.
- Check the condition of the rotor and the knife bolts.



Remove Discharge Door

201237

- Remove twine or other materials wrapped around the ends of the rotor shafts.
- Check the condition of the twine scrapers (1) on the shafts.
  - See Section 4 for Twine Scraper Adjustment.
- Replace the discharge door.
- Connect door supports and fasten with the hairpins.

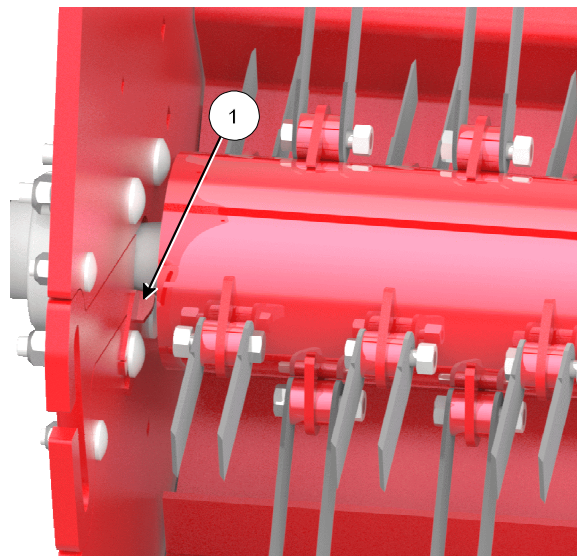

Remove Twine From Rotor Shaft

218155C2

## Section 2 - Feed Chopper 650 Preparation

5. Ensure all the drive shields are in place and in good repair.



The Feed Chopper shall not be operated without all the driveline shields in place.



Ensure All Drive Shields Are In Place

201250


### Discharge Door Setup For Feed Chopper Operation

The Feed Chopper door is set to direct material from the CFR 650 into the Feed Chopper rotor.

**Note: The Feed Chopper drive clutch must be disengaged before lowering the discharge door.**

**Serious damage to the Feed Chopper knives and discharge door will result if the drive clutch is engaged with the discharge door lowered. The rotating knives will hit the door.**

1. Place the door hinge rod at the bottom of the slot.
2. Rotate the door so the back of the door (1) is up against the CFR 650 tub.
3. Connect the door support with the door front pin in the middle large hole (2) and the small pin in the hole labeled "C". It is the lowest small hole (3).
4. Fasten with the hairpin.

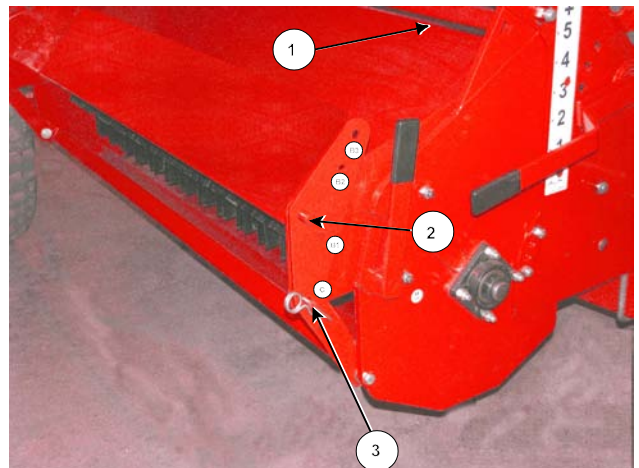

Discharge Door Settings for Feed Chopping

201240C

### Discharge Door Setup For CFR 650 Operation Only

The Feed Chopper drive must be disengaged and the door lowered to allow material to pass over and not be chopped further.

The discharge door has 3 bypass settings to allow for different heights of material discharge.

**Note: The Feed Chopper drive clutch must be disengaged before lowering the discharge door.**

**Serious damage to the Feed Chopper knives and discharge door will result if the drive clutch is engaged with the discharge door lowered. The rotating knives will hit the door.**

#### Setting B1 - No Additional Height Discharge

1. Place the door hinge rod at the bottom of the slot.
2. Lower the door to be flush with the bottom of the CFR 650 outlet (1).
  - Ensure the edge between the CFR 650 and the Feed Chopper inner flange is clear of debris.
  - The rotor must also be positioned with the knived sections at 90 degrees to the discharge door.
3. Connect the door support with the small pin in the hole labeled "B1". It is the 2<sup>nd</sup> from the bottom small hole (2).
4. Fasten with the hairpin.



No Height Discharge Setting

201242C


## Section 2 - Feed Chopper 650 Preparation

**Note:** The Feed Chopper drive clutch must be disengaged before lowering the discharge door.

Serious damage to the Feed Chopper knives and discharge door will result if the drive clutch is engaged with the discharge door lowered. The rotating knives will hit the door.

### Setting B2 - Some Additional Height Discharge

1. Place the door hinge rod at the middle of the slot.
2. Lower the door to be flush with the bottom of the CFR 650 outlet (1).
3. Connect the door support with the small pin in the hole labeled "B2". It is the 3<sup>rd</sup> from the bottom small hole (2).
4. Fasten with the hairpin.

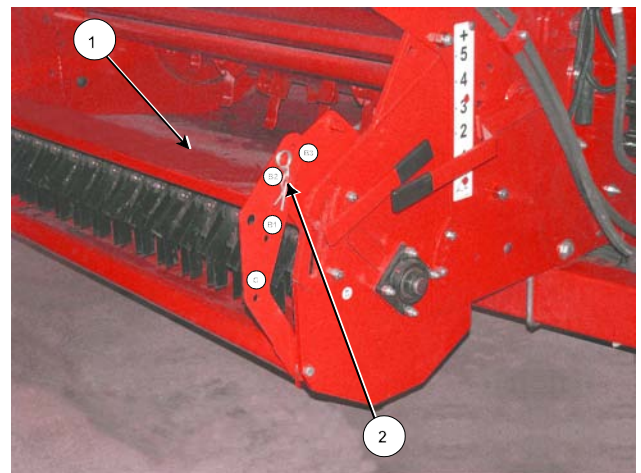


Some Height Discharge Setting

201243C

### Setting B3 - Maximum Height Discharge

1. Place the door hinge rod at the top of the slot.
2. Lower the door to be flush with the bottom of the CFR 650 outlet (1).
3. Connect the door support with the small pin in the hole labeled "B3". It is the 4<sup>th</sup> from the bottom small hole (2).
4. Fasten with the hairpin.

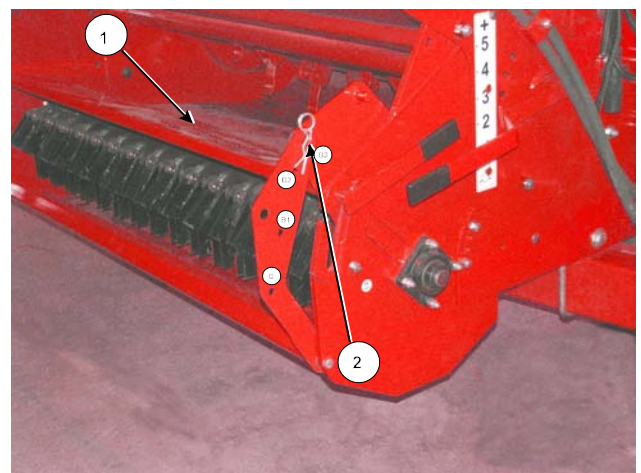

Maximum Height Discharge

201244C


This Page Left Blank

### 3.0 OPERATING THE FEED CHOPPER

#### Operating With the Feed Chopper




Shut off the tractor engine and remove the key.

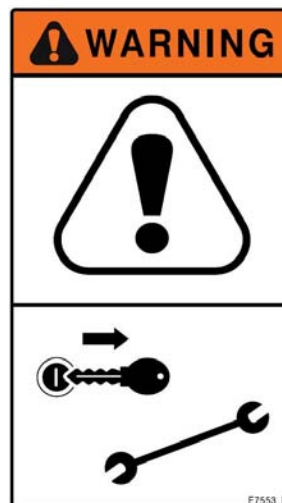

Wait for all components to stop rotating.

Do not place hands in the Feed Chopper drive clutch area while the flail drum is turning. Contact with the rotating large pulley engaged to the rotating flail drum can cause serious injury.

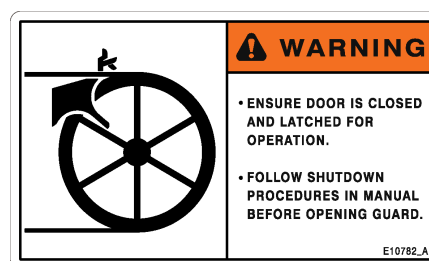

Ensure all shields are in place and in good condition.



### Section 3 - Operating the Feed Chopper

1. Position the Feed Chopper discharge door to direct material from the CFR 650 into the Feed Chopper rotor.
  - See Section 2 - "Discharge Door Setup" for the instructions in this process.



Position the Discharge Door

201245

**Note:** Before engaging the Feed Chopper drive clutch, the Feed Chopper discharge door must be raised to accept material.

Serious damage to the Feed Chopper knives and discharge door will result if the drive clutch is engaged with the discharge door lowered. The rotating knives will hit the door.



2. Open the Drive Guard Door.

- Remove the rubber door latch (1).



Remove Rubber Door Latch

201251C

### Section 3 - Operating the Feed Chopper


3. Pivot the drive guard door to access the drive clutch area.



Open Guard Door

201252


4. Engage the feed chopper drive.
  - Rotate the large pulley to have the clutch lock plate at the top.
  - The clutch pin (3) is disengaged when the pin is pulled out against the spring and the inner roll pin is out of the slot.
  - To engage the clutch, twist the clutch pin to move the roll pin forward through the slot (4).

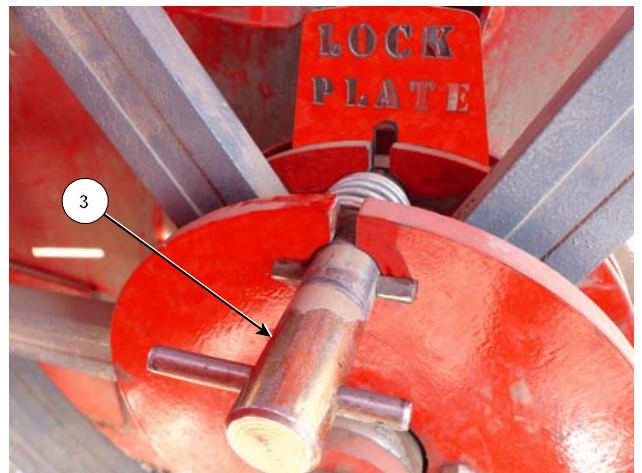

Disengaged Clutch Pin

217156C

5. Rotate the large pulley until the clutch pin snaps into a connecting hole in the flail drum plate.
  - There are a number of possible connecting holes.
  - A small amount of rotation of the sheave will be required to engage into one of the holes.

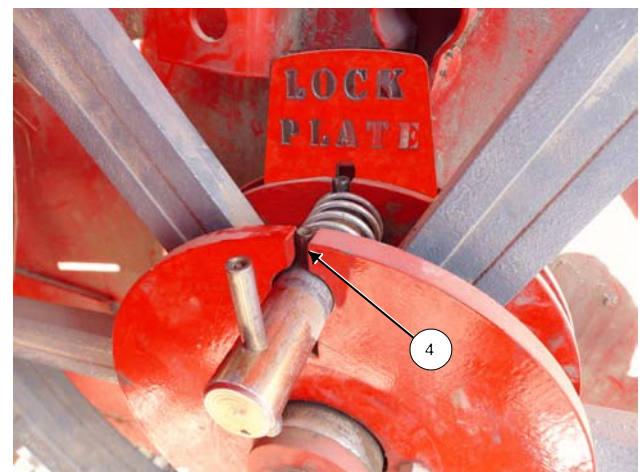

Twist Pin into Engagement Position

217157C

### Section 3 - Operating the Feed Chopper

6. Push the clutch pin forward and twist the pin 90 degrees until the rear roll pin snaps into a notch in the lock plate.



Push and Twist Clutch Pin

217158.

- The second roll pin (5) should be behind the front plate of the clutch.



Locked Clutch Pin

217159C

7. Close the access door and fasten with the rubber door latch.



Close and Fasten Access Door


201257

### Section 3 - Operating the Feed Chopper

8. Begin to process a bale in the CFR 650.
9. The Feed Chopper will be driven by the belt drive and chop the processed material an additional amount.



Should any vibration be detected during the operation of the machine, immediately stop the machine. Determine the source of the problem and fix it before resuming operation.

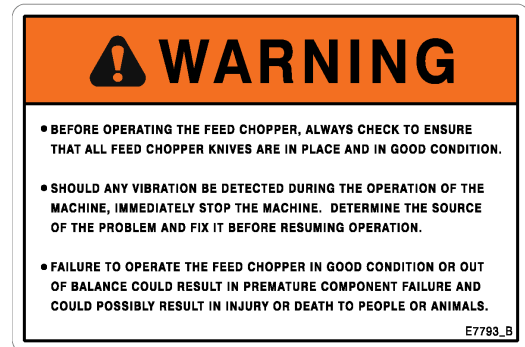

10. Drive ahead slowly while operating the CFR 650 /Feed Chopper.



Avoid discharging material in the area of people and animals.



### Operating Without the Feed Chopper

The CFR 650 can be operated without additional chopping of material.




Shut off the tractor engine and remove the key.



Wait for all components to stop rotating.


Do not place hands in the Feed Chopper drive clutch area while the flail drum is turning. Contact with the rotating large pulley engaged to the rotating flail drum can cause serious injury.

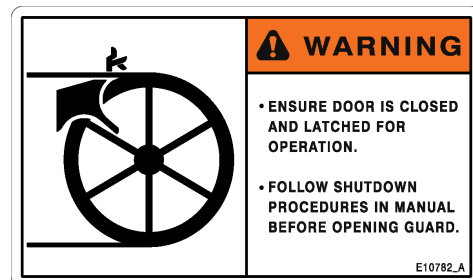

### Section 3 - Operating the Feed Chopper

#### 1. Open the Drive Guard Door.

- Remove the rubber access door latch (1).

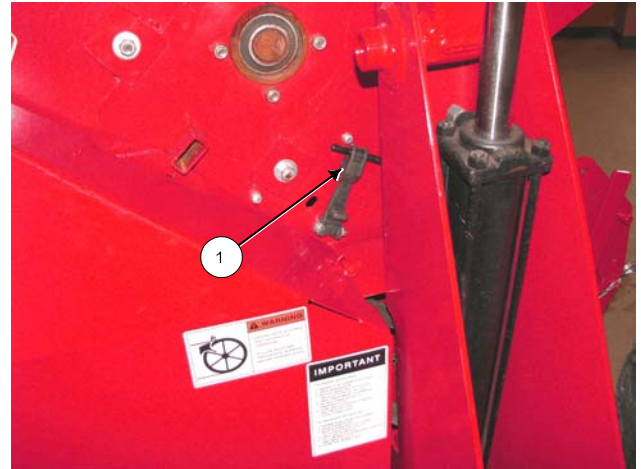

Remove Rubber Holder

201251C

#### 2. Pivot the drive guard door (2) to open the drive clutch area.




Open Guard Door

201252

#### 3. Disengage the Feed Chopper drive.

- Push in the clutch pin and twist it 90 degrees to release the roll pin from the lock plate.
- Twist the clutch pin until the spring moves the second roll pin through the slot (4)
- This will move the clutch pin out of the flail drum plate.

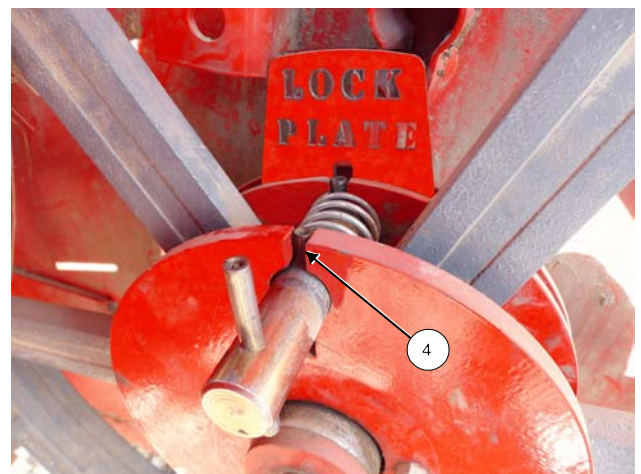


Twist Clutch Pin to Disengage Drive

217157C

### Section 3 - Operating the Feed Chopper

4. Pull the clutch pin (3) until the second roll pin has cleared the slot.
  - Twist the clutch pin (3) until the second roll pin is resting against the clutch front plate.

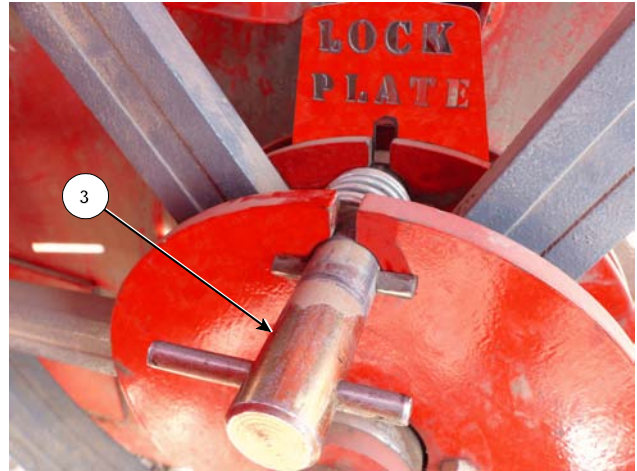

Pull and Twist Pin to Lock

217156C

5. Lower the Feed Chopper discharge door to allow material to pass out of the CFR 650 and over the Feed Chopper.
  - See Section 2 - "Discharge Door Setup For CFR 650 Operation Only" for the instructions in this process.



Lower Door to Pass Material Over Chopper

201242C2

6. Drive ahead slowly while operating the CFR 650.



Avoid discharging material in the area of people and animals.



### Unplugging the Feed Chopper

1. Reduce the engine speed to idle.
2. Disengage tractor power take off (PTO).
3. Set the tractor park brake.




Shut off tractor engine and remove key.



Wait for all components to stop rotating.

Do not place hands in the Feed Chopper while the rotor is turning. Contact with the rotating knives will cause serious injury.

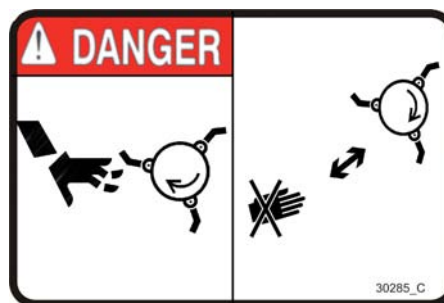

4. Disengage the Feed Chopper drive by moving the clutch pin out and twisting it so the second roll pin is resting on the clutch front plate.



Do not place hands in the Feed Chopper drive clutch area while the flail drum is turning. Contact with the rotating large pulley engaged to the rotating flail drum can cause serious injury.



Disengage the Chopper Drive

217156

### Section 3 - Operating the Feed Chopper

---

5. Remove the discharge door to gain access to the chopper rotor and housing.

- Disconnect the discharge door supports by removing the hairpins and removing the door from the support holes.



Disconnect Discharge Door Supports

201238


- Remove the discharge door by sliding the door hinge from the slots.



Remove Discharge Door

201237

- Clear the chopping area and the knives.
- Replace the discharge door by sliding the door hinges into the slots.
- Connect the door support with the door front pin in the middle large hole and the small pin in the lowest small hole labeled "C".
- Fasten with the hairpin.

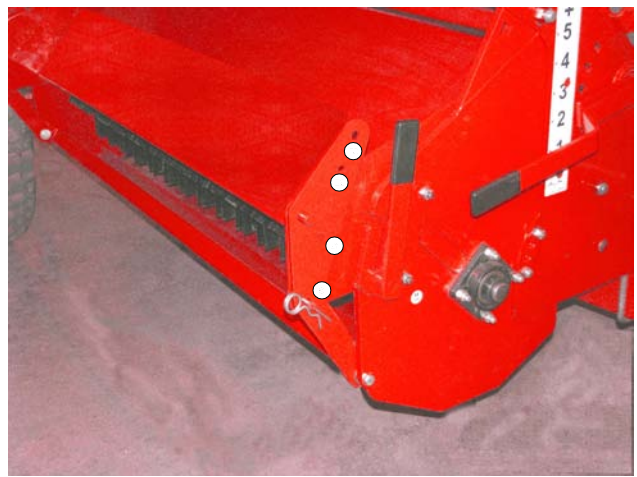

Replace Door and Connect Door Supports

201240C2

### 4.0 MAINTAINING THE FEED CHOPPER



Shut down the tractor and remove the key before repairing, servicing, lubricating or cleaning the machine.

Relieve all hydraulic pressure in the hoses. Disconnect the hydraulic hoses from the tractor before going near the machine.



#### Lubrication

Lubricate all grease fittings with a quality lithium soap compatible E.P. grease meeting the N.L.G.I. #2 specifications and containing no more than 1% molybdenum disulfide.

#### Every 10 Hours

- Lubricate rear rotor bearing.
  - Access the grease point through the hole in the drive cover.



Grease Rear Rotor Bearing

201258C

- Lubricate front rotor bearing.



Grease Front Rotor Bearing

201259C

### Greasing the CFR 650 Rear Flail Drum Bearing (Every 50 hours)

- To access the CFR 650 rear flail drum bearing:
  - Open the drive guard door.
  - Rotate the sheave to access the grease zerk on the bearing.




Grease Flail Drum Bearing

201260C

### Twine Cutter Access

- To access the twine cutter opening:
  - Open the drive guard door.
  - Insert the twine cutter into the twine cutter opening (1).

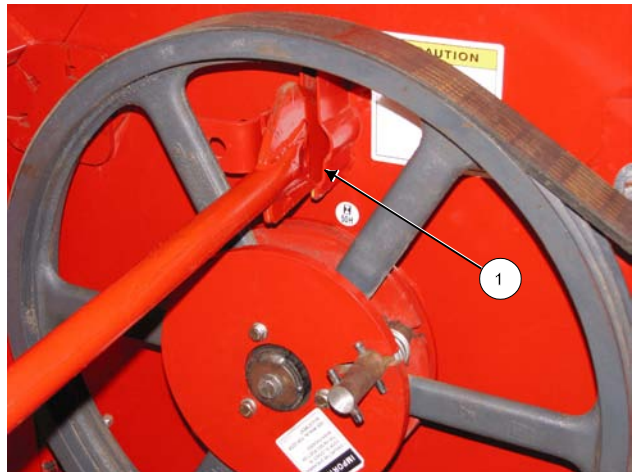

Twine Cutter Access

201261C


### Knife Replacement

Replace knives that are broken or worn to the point that they will not process material properly.

Four knives must be replaced at the same time.

Note: To maintain rotary balance, the set of knives on the opposite side of the rotor must be replaced at the same time. (3)

- Remove the nut and bolt holding the knives.
- Discard the set of old knives, the bolt and nut.
- Install the knives using the new bolt and nut.

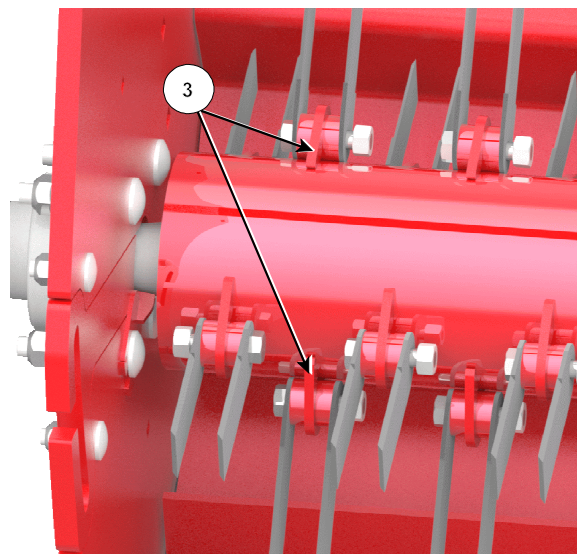

Replace Knife Set & Opposite Set

218155C

## Section 4 - Maintaining the Feed Chopper

### Belt Tension Adjustment

The belt tension adjuster will automatically adjust to keep the belt tight.

If a different tension is needed, there are 2 other holes that the anti-rotation bolt (1) can be placed into.



Belt Tension Adjustment

201262C


### Rotor Twine Scraper Adjustment

Adjust the twine scrapers (3) on both ends of the rotor shaft.

Note: On the rear shaft remove the sheave shield (2) to get access to the bearing bolts.


- Loosen the bearing bolt nuts (4) that have the twine scraper on it to allow the bearing bolts to be loose.
- Slide the twine scraper (3) on the bearing bolts until it is almost touching the rotor shaft.
  - Do not have the scraper touching the rotor shaft.
    - To ensure clearance, use a flashlight to check for a visible sliver of light between the edge of the twine scraper and the rotor shaft.
- Tighten the bearing bolt nuts (4) to fasten the scraper in place.
  - Torque to 65 lb-ft (88 Nm).

Note: On the rear shaft replace the outer sheave shield and fasten in place.

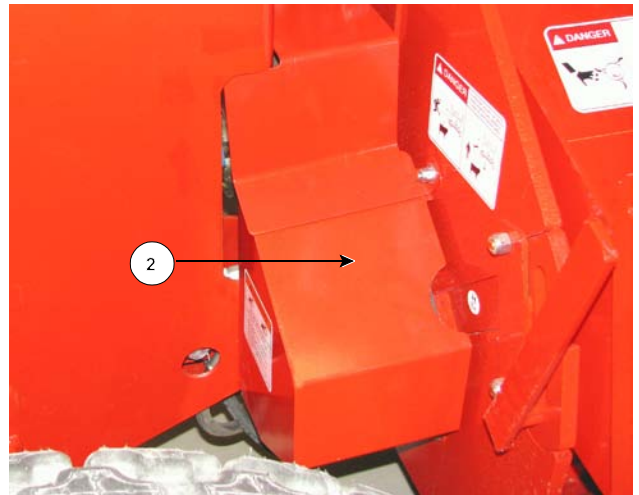

Remove Rear Sheave Shield

201258C2

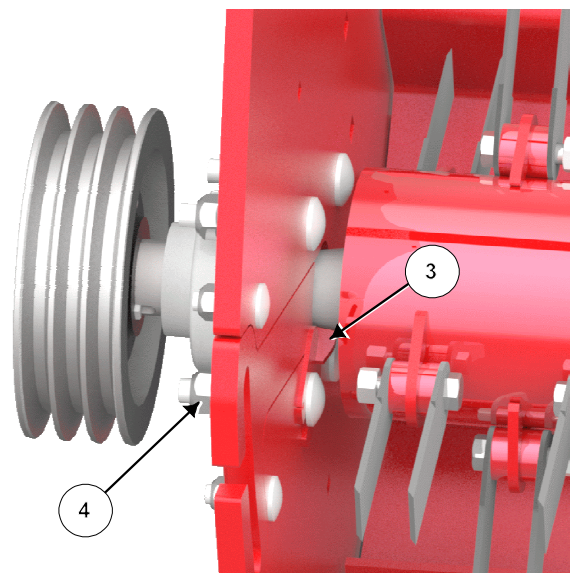

Adjust Twine Scrapers on Rotor Shaft

218154C

This Page Left Blank

## 5.0 TROUBLESHOOTING

### Operation

Symptom	Problem	Solution
Excessive Rotor Vibration	Broken knife.	Replace knives in pairs. Also replace knife pair on opposite side of the rotor to maintain rotational balance.
	Missing knives.	Replace knives in pairs. Also replace knife pair on opposite side of the rotor to maintain rotational balance.
	Foreign material lodged in chopper housing.	Remove foreign material.
		Check condition of knives. Replace knives as pairs and also replace knife pair on opposite side of rotor to maintain rotational balance.
	Failed rotor end bearing.	Check for damage to the rotor. Contact Highline for proper repair procedure.
		Check if rotor rotation feels rough. Replace failed bearing.
		Check for rotor side play. Replace failed bearing.
		Visually inspect bearing. Replace failed bearing.

## Section 5 - Troubleshooting

Symptom	Problem	Solution
Rotor Does Not Spin	Drive clutch is not engaged.	Twist the clutch pin to move the roll pin into the slot. Rotate the large pulley until the drive pin snaps into a connecting hole in the flail drum plate. Push the clutch pin forward and twist to lock the clutch pin.
	Broken Belt.	Replace the belt.
	Foreign material lodged in housing.	Remove foreign material to allow rotor to spin freely. Check condition of knives. Replace knives as pairs and also replace knife pair on opposite side of rotor to maintain rotational balance.
	Rotor bearing has seized.	Check bearings or replace.
Rotor Stops Spinning	Drive clutch pin has moved out and no longer is engaged with the flail drum plate.	Twist the clutch pin to move the roll pin into the slot. Rotate the large pulley until the drive pin snaps into a connecting hole in the flail drum plate. Push the clutch pin forward and twist to lock the clutch pin.
	Belt has come off the sheaves or tensioner.	Place the belt on the sheaves and the tensioner. Check the alignment of the sheaves and tensioner. Adjust if needed.
	Broken belt.	Replace the belt.
Drive Belt Loose	Tension bracket has allowed idler to move.	Check that the anti-rotation bolt on the tension bracket is in place. Replace the bolt.
	Belt has stretched.	Replace the belt.
		Move the tensioner bolt.

# Highline New Equipment Limited Warranty Policy

One (1) Year / 12 Months - Parts and Labour

Highline Mfg. Ltd. (hereinafter "Highline") warrants this new product of Highline's manufacturer to be free from defects in material and workmanship, under normal use and service for one (1) full year after initial purchase/retail sale. Highline will warrant its product for one (1) year parts and labour, if performed by a qualified Dealer. This Limited Warranty shall apply only to complete machines of Highline's manufacture. Parts are covered by a separate Limited Warranty.

**EQUIPMENT AND ACCESSORIES NOT OF HIGHLINE'S MANUFACTURE ARE WARRANTED ONLY TO THE EXTENT OF THE ORIGINAL MANUFACTURER'S WARRANTY AND SUBJECT TO THEIR ALLOWANCE TO HIGHLINE ONLY IF FOUND DEFECTIVE BY SUCH MANUFACTURER.**

During the Limited Warranty period specified above, any defect in material or workmanship in any warranted item of Highline Equipment not excluded below shall be repaired or replaced at Highline's option without charge by any authorized independent Highline Dealer. An authorized Dealer must make the warranty repair or replacement. Labour in accordance with Highline's labour reimbursement policy. Highline reserves the right to supply remanufactured replacement parts as it deems appropriate.

## **RETAIL PURCHASER RESPONSIBILITY**

This Limited Warranty requires proper maintenance and periodic inspections of the Equipment as indicated in the Operator's Manual furnished with each new Equipment. The cost of routine or required maintenance and services is the responsibility of the retail purchaser. The retail purchaser is required to keep documented evidence that these services were performed. This Highline New Equipment Limited Warranty may be subject to cancellation if the above requirements are not performed.

## **EXCLUSIONS AND LIMITATIONS**

The warranties contained herein shall NOT APPLY TO:

1. Any defect which was caused (in Highline's sole judgement) by other than normal use and service of the Equipment, or by any of the following:
  - a. accident
  - b. misuse or negligence
  - c. overloading
  - d. of reasonable and proper maintenance
  - e. improper repair or installation
  - f. unsuitable storage
  - g. non-Highline approved alteration or modification
  - h. natural calamities
  - i. vandalism
  - j. parts or accessories installed on Equipment which were not manufactured or installed by Highline authorized Dealers
  - k. the elements
  - l. collision or other accident.
2. Any Equipment whose identification numbers or marks have been altered or removed.
3. Any Equipment which any of the required or recommended periodic inspection or services have been performed using parts not manufactured or supplied by Highline or meeting Highline Specifications including, but without limitation, lubricants (oil, grease), belt lacings, and hydraulic fluids.
4. Any Equipment used in demonstrations not performed by a Highline Dealer. Warranty will be at the discretion of Highline for all other demonstration warranty.
5. New Equipment delivered to the retail purchaser in which the warranty registration has not been completed and returned to Highline within thirty (30) days from the date of purchase.
6. Any defect that was caused (in Highline's sole judgement) by operation of the Equipment not abiding by standard operating procedures outlined in the Operator's Manual.
7. Tire Limited Warranties and support are the responsibility of the respective product's manufacturer.
8. Transportation costs, if any, of transporting to the Highline Dealer.
9. In no event shall Highline's liability exceed the purchase price of the product.
10. Highline shall not be liable to any person under any circumstances for any incidental or consequential damages (including but not limited to, loss of profits, out of service time and damage to equipment which this equipment may be attached) occurring for any reason at any time.
11. Diagnostic and overtime labour premiums are not covered under this Limited Warranty Policy.

12. Depreciation damage caused by normal wear, lack of reasonable and proper maintenance, failure to follow operating instructions, misuse, and/or lack of proper protection during storage.
13. Accessory systems and electronics not of Highline's manufacture are warranted only to the extent of such manufacturer's respective Limited Warranty if any.
14. Wear items which are listed by product group below:

#### **COMMON WEAR ITEMS**

Roller chain, sprockets, clutches, shear bolts, clutch components, chains, gearbox housings bolts/torqued parts, flails, feed roller belting, coupler chain, DRV couplers, bogie wheels, apron tines and hoses, blades and blade pans, blade bolts and nuts, skid shoes, chain guards, clutches and clutch components.

#### **PARTS WARRANTY**

Parts replaced in the warranty period will receive the balance of the one year New Equipment Limited Warranty. Replacement parts after the original machine warranty are warranted to be free from defects of material for ninety (90) days or the part will be repaired or replaced, without labour coverage for removal and reinstallation.

#### **EXCLUSION OF WARRANTIES**

UNLESS OTHERWISE REQUIRED BY LAW, AND EXCEPT FOR THE WARRANTIES EXPRESSLY AND SPECIFICALLY MADE HEREIN, HIGHLINE MAKES NO OTHER WARRANTIES, AND ANY POSSIBLE LIABILITY OF HIGHLINE HEREIN UNDER IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OF MERCHANT ABILITY OR FITNESS FOR A PARTICULAR PURPOSE. HIGHLINE RESERVES THE RIGHT TO MODIFY, ALTER AND IMPROVE ANY PRODUCT WITHOUT INCURRING ANY OBLIGATION TO REPLACE ANY PRODUCT PREVIOUSLY SOLD WITH SUCH MODIFICATION. NO PERSON IS AUTHORIZED TO GIVE ANY OTHER WARRANTY, OR TO ASSUME ANY ADDITIONAL OBLIGATION ON HIGHLINE'S BEHALF.