

AccuMix™

AMX520T

Operator Manual



www.highlinemfg.com

 **Highline**
MANUFACTURING
A DIVISION OF BOURGAULT INDUSTRIES LTD.

E22937_A

AccuMix™ AMX520T

Towed Vertical Feed Mixer

Operator Manual

From Serial Number AM4547601

Highline Manufacturing
HWY #27, P.O. Box 307
Vonda, SK S0K 4N0
Canada
Phone: 306.258.2233
Fax: 306.258.2010
Toll Free: 1.800.665.2010

E22937_A

Highline Team Message

***Congratulations on your purchase of the AccuMix AMX520T** manufactured by Highline Manufacturing. We are excited about you feeding with this technically advanced feed mixer. You will find flexibility and maneuverability of operation with this product.*

This Operator Manual has been prepared to provide information necessary for the safe and efficient operation of your AccuMix AMX520T. In the manual you will find safety procedures, maintenance routines and detailed operational instructions.

If you find that you require information not covered in this manual, please feel free to consult your local dealer. Your dealer is always able to contact Highline for this technical information.

Highline Manufacturing thanks and congratulates you for selecting the AccuMix AMX520T as your machine of choice.

Highline Manufacturing

Table of Contents

Section 1 - Safety

Serial Number	1
Safety Sign-off Form	2
Safety Alert Symbol	3
General Safety	4
Safety Decals	4
Safety Decal Locations	10

Section 2 - Transporting the AMX520T

Tractor Requirements	2	Check the wheel nut torque	6
Adjust the tractor drawbar length	2	Ensure the tub door is closed	6
Connect the hitch to the tractor	3	Turn off the screws when the tub is empty.	7
Connect the safety chain	3	Turn off the unload conveyor	7
Attach the driveline to the PTO	4	Fasten the flip up conveyor transport lock	7
Connect the chains on the driveline guards	5	Ensure that the Slow Moving Vehicle (SMV) sign is clean and visible	8
Fold down the PTO support holder	5	Transport	8
Attach the hydraulics	5		
Place the hitch jack in the storage location.	5		
Check the condition of the tires	6		
Check the tire pressure	6		

Section 3 - Preparing the AMX520T

Park the tractor and AMX520T on level ground	1	Clean out material on the bottom of the conveyor	7
Adjust the height of the mixer hitch tongue	1	Flip up conveyor or the dog leg conveyor	8
Connect the safety chain to the tractor	2	Check that the pivot points (1) on both sides	8
Attach the driveline to the tractor PTO	2	Remove the conveyor transport lock	8
Inspect all the hydraulic motors, cylinders and hoses	4	Conveyor raises/lowers for bunk height adjustment.	8
Visually check that the tub does not have any build up	4	Check that the mixing screw in the tub operates normally.	9
Visually check that the screw	4	Check the oil level for the mixing screw drivebox.	9
Check the condition of the knives installed on the screw.	5	Check the condition of the tires	10
Move the aggression bars	5	Air Pressure	10
Check that the front unloading tub door works	6	Torque the wheel nuts.	10
Take precautions if it is required to enter the tub	6	Check that the weigh scale display is working	10
Check that the unload conveyor operates and moves freely	7	Optional second weigh scale display	11
		Check that the camera display is working	11
		Lubricate all grease fittings	11

Section 4 - Operating the AMX520T

Cutting and Mixing - General Considerations	1	Driving to the Feeding Site	5
Loading Materials	2	Unloading the Mix	6

Section 5 - Maintaining the AMX520T

Lubrication - Grease	1	Tires	9
Every 10 Hours	1	Air Pressure	9
Every 100 Hours	2	Tire Changing Procedure	10
Every 500 Hours or Every Year	4	Visually Inspect Hydraulic Hoses/Fittings	11
Once a Year (Annually)	4	Visually Inspect the Hydraulic Cylinders	11
Every 2,000 Hours	5	Adjust the Kicker Plate on the Screw Leading Edge	12
Mixing Screw Drivebox Oil	6	Adjust the Screw Sweeper	12
To Fill the Drivebox with Oil	6	Knives on the Screw	12
Draining the Oil in the Screw Drivebox . .	7	Adjusting the Unloading Conveyor Chains	13
Filling the Screw Drivebox with Oil after		Recommended Service Interval Chart	15
Draining	7	Calibration Procedure for DigiStar/TopCon Display	
If the oil tank has been overfilled	8	Weigh Scale	16
Wheel Nut Torque	9	Calibration Procedure for Dinamica Generale DG500	
		Weigh Scale	17

Section 6 - Storing the AMX520T

Clean all the debris	1	Fasten the flip up conveyor transport lock	3
Remove all material that is inside the tub	1	Relieve the pressure on the hydraulic hoses and	
Park the machine on level ground	1	disconnect them	3
Place the jack onto the hitch	1	Disconnect the electrical connection	3
Raise the tub door	2	Secure the hydraulic hoses and electrical connector	4
Remove driveline from the tractor PTO shaft . .	2	Tighten all bolts	4
Place the driveline into the driveline support . .	2	Check the machine for worn and damaged parts . .	4
Disconnect the safety chain from the tractor . .	3	Touch-up the paint to prevent	4
Remove the hitch pin from the tractor	3		

Section 7 - Troubleshooting

Section 8 - AMX520T Specifications

GENERAL DESCRIPTION OF THE ACCUMIX AMX520T

The AccuMix AMX520T is a towed total mixed ration machine. It is intended to cut and mix various types of feed products to prepare a mixed ration for feeding livestock.

The power for the mixing screw is provided by a driveline powered by the tractor. The tractor hydraulics are used for opening and closing the front tub door and operating the feed unloading conveyor. The tractor hydraulics also control the optional lifting conveyor if it is present.

The operator drives and controls the machine from the tractor cab. The feed materials are loaded into the mixing tub by means of a pay loader or other loading equipment.

The adding of additives can be done by the operator by standing on the platform and loading additives into the tub.

There is 1 mixing screw that performs cutting and mixing of the materials in the tub. The speed of the mixing screw is adjusted by the operator in the cab by adjusting the PTO speed. The mixing screw is powered by a driveline from the tractor. There is the option of a 2 speed power gearbox for input speed decrease. A planetary gearbox located under the screw provides rotation to the screw. The planetary gearbox is equipped with a remote oil reservoir.

The mixing tub is mounted on weigh scales that give readout of the weight of material in the tub to a display or remote display. The weigh scales can also be used to know the weight of material being loaded.

It is recommended that the proportions of the feed materials in the ration be determined in consultation with an animal feed nutritionist. The loading operator regulates the amount of material that is added according to the ration mix prescribed by the nutritionist.

While traveling to the feeding site the mixing screw in the tub agitates the product to cut the material and provide a uniform mix.

The material is discharged onto the conveyor to be unloaded on the side of the machine. There is a flat conveyor that can discharge on the right of the machine. The optional high lift conveyor places the material into a feed bunk.

The transporting of feed materials and feeding discharge is controlled by the operator in the tractor cab.

The main source of noise when using the machine is the tractor engine and the mixing screw when operating. The tractor engine noise is not under the control of Highline. The mixing screw gearbox used on the machine generates minimal noise.

INTENDED USE OF THE ACCUMIX AMX520T

The AccuMix AMX520T is designed to process and mix various animal feeds and to unload animal feed suitable for feeding livestock in a ration that is designed by an animal nutritionist. The AccuMix AMX520T is intended for use in farming applications. The AccuMix AMX520T is intended for off road use.

Any uses of the AccuMix AMX520T other than the above stated Intended Uses shall be considered misuse of the AccuMix AMX520T. This misuse shall include (but not limited to):


- Using the AccuMix AMX520T in non-farming applications
- Processing materials other than animal feed materials

Always use the AccuMix AMX520T according to the instructions contained in this Operator Manual and the safety and instruction decals on the machine.

Perform regular maintenance and repair to ensure that the AccuMix AMX520T operates safely and efficiently.

SERIAL NUMBER

The serial number plate (1) is attached to the AMX520T on the left side of the hitch near the hitch tongue.

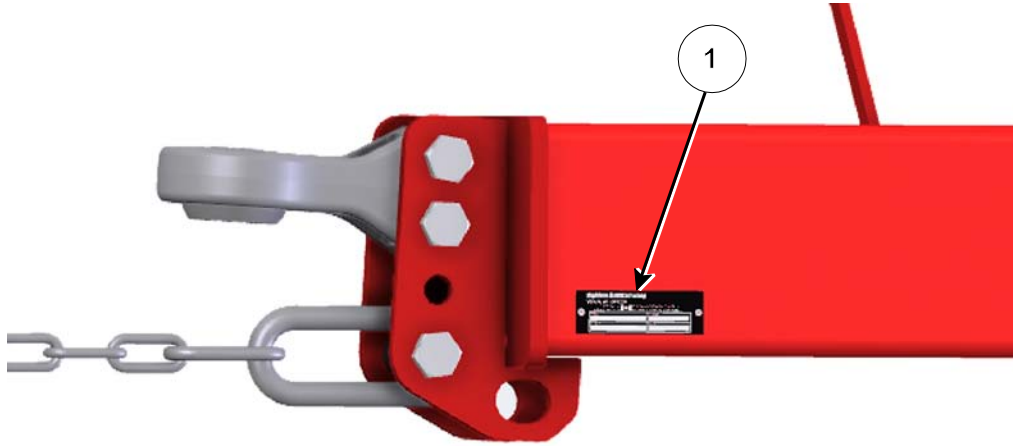

Serial Number Plate Location

224195C

It is important to record the serial number for proof of ownership and for any service or maintenance assistance.

Serial Number _____

Owner _____

Model _____

Date of Purchase _____

Section 1 - Safety

SAFETY SIGN-OFF FORM

Highline Manufacturing follows the general Safety Standards specified by the American Society of Agricultural and Biological Engineers (ASABE) and the Occupational Safety and Health Administration (OSHA). Anyone who will be operating and/or maintaining the AccuMix AMX520T should read and clearly understand all Safety, Operating and Maintenance information presented in this manual.

Do not operate or allow someone to operate this equipment until this information has been reviewed. This information should be reviewed by all operators.

This sign-off sheet is provided for record keeping to indicate that the person working with the equipment has read and understood the information in the Operator Manual and has been instructed in the safe operation of the equipment.

Date	Employee's Signature	Employer's Signature

SAFETY ALERT SYMBOL

The Safety Alert Symbol means:



ATTENTION!
BECOME ALERT!
YOUR SAFETY IS INVOLVED!

The Safety Alert Symbol combined with a Signal Word alert to the presence of a hazard and the degree of possible injury.



Indicates an imminently hazardous situation that, if not avoided, **WILL** result in **DEATH OR SERIOUS INJURY**. The color is Red with White lettering.



Indicates a potentially hazardous situation that, if not avoided, **COULD** result in **DEATH OR SERIOUS INJURY**, and includes hazards that are exposed when guards are removed or unsafe practices. The color is Orange with Black lettering.



Indicates a potentially hazardous situation that, if not avoided, **MAY** result in **MINOR INJURY**. The color is Yellow with Black lettering.

GENERAL SAFETY

1. Ensure that anyone who is going to operate, maintain or work near the AccuMix AMX520T is familiar with the recommended operating, maintenance procedures and safety information contained in this manual and follows all the safety precautions.
2. In addition to the design and configuration of the equipment, hazard control and accident prevention are dependent upon the awareness, concern, prudence and proper training of personnel involved in the operation, transport, maintenance and storage of the machine.
3. The AccuMix AMX520T shall not be operated without all the guards in place.

SAFETY DECALS

1. Keep decals and signs clean and legible at all times.
2. Replace decals and signs that are damaged, missing or have become illegible.
3. Replaced parts that displayed a decal should also display the current decal.
4. Decals are available from the Highline Parts Department.
5. Be familiar with the decals, the type of warning and the area or function(s) related to the area(s) that requires your awareness.

DO NOT ENTER THE TUB WHILE THE MIXERS ARE TURNING



Entering the tub when the mixers are turning will result in death or serious injury.

Do not lean over the mixing tub while the screws are turning to avoid the danger of falling into the tub.

DO NOT CONTACT THE ROTATING SCREWS

Never attempt to manually remove debris while the screws are rotating.

DO NOT ENTER THE TUB WITH MATERIAL IN THE TUB

The material is unstable and may cause entrapment.

There is no means of exiting the tub when the tub is full.



DO NOT CONTACT ROTATING DRIVELINE

Contact with rotating driveline will cause serious injury or death.

Keep all driveline guards in place.

Securely attach drivelines at both ends.

Check that the driveline guards turn freely on the driveline.

DO NOT OPERATE WITH SHIELDS MISSING

Stop engine and ensure the PTO driveline is stopped before working on driveline




STAND CLEAR OF THE DISCHARGE DOOR DURING OPERATION

A lowering discharge door will result in death or serious injury.

Ensure the door is locked open before entering the tub.

Before entering an empty tub to perform service:

- Ensure the tractor is turned off, the key is removed.
- All parts have stopped moving.
- The discharge door is supported in the open position.



STAY AWAY FROM OVERHEAD POWER LINES

Serious injury or death from electrocution can occur without contacting power lines.

Stay away from overhead power lines when transporting and operating equipment.



STAND CLEAR OF THE UNLOADING CONVEYOR

Contact with the moving conveyor could cause serious injury or death.

Keep body and clothing away from moving parts to prevent serious injury or death.

Shut off the machine and remove the key before performing any maintenance on the conveyor.



DO NOT ALLOW RIDERS ON THE MACHINE

Falling from the moving machine can cause serious injury or death.

Falling from the operating machine can cause being entangled under the machine or being injured by the machine.

KEEP STEPS AND WALKWAYS CLEAN

Dirty or slippery steps, walkways and platforms can cause falls. Make sure these surfaces remain clean and free of debris.

Injury may result from slippery surfaces.

Face the machine when mounting and dismounting.



USE PAPER OR CARDBOARD TO CHECK FOR HYDRAULIC OR DIESEL FUEL LEAKS

The hydraulic system operates under extremely high pressure. Hydraulic oil leaking under pressure can penetrate the skin, causing serious injury or infection.

Wear proper hand and eye protection when searching for leaks. DO NOT use your hand to check for leaks. Use a piece of cardboard or paper.

Stop the engine, remove the key and relieve the pressure before connecting or disconnecting, repairing or adjusting hydraulic lines.

Make sure all components are in good condition and tighten all connections before pressurizing the system.

If hydraulic fluid penetrates the skin, seek medical attention immediately.

Continuous long term contact with hydraulic fluid may cause skin cancer. Avoid long term contact and wash the skin promptly with soap and water.

Do not attempt any makeshift repairs to the hydraulic fittings or hoses. The hydraulic system operates under extremely high pressure. Such repairs will fail suddenly and create a hazardous and dangerous condition.




IMPLEMENT IS DESIGNED FOR OFF ROAD USE ONLY.

This implement is designed for off road use only. It is not intended for use on public roads.

To transport on public roads consult with local traffic regulations.

READ, UNDERSTAND AND FOLLOW SAFETY INSTRUCTIONS



Read, understand and follow all instructions and safety messages included in this manual and on decals attached to the machine. These instructions and safety messages contain important information.

Allow only responsible, properly instructed individuals to operate and service the machine.

Failure to follow the instructions and safety messages in this manual and on the decals attached to the machine could result in serious injury or death.

Keep all safety and instruction decals in good condition. Replace any missing or damaged decals.

SHUT DOWN THE ENGINE BEFORE DISMOUNTING TRACTOR



Shut down the engine and remove the key before repairing, servicing, lubricating or cleaning the machine.

Do not attempt to clean, lubricate, clear obstructions or make adjustments to the machine while it is in motion or while the engine is running.

DO NOT CONTACT A MOVING CHAIN



Contacting a moving chain or parts could cause serious injury or death.

Close and secure guards and shields before starting.

Keep hand, feet, hair and clothing away from moving parts.

Never attempt to manually remove material while hydraulic motors are moving the chain.

Always shut off the engine, remove key, set park brake and wait for all parts to stop moving before servicing.



DO NOT EXCEED PTO SPEED

Do not operate at excess speeds or damage to the machine may result.



EXPLOSION HAZARD!

Do not remove, install or make repairs to a tire on a wheel rim. Take the tire and rim to a tire shop. Always have a qualified tire mechanic service the tires and rims on this machine.

Failure to comply could result in death or serious injury.




ENSURE SLOW MOVING VEHICLE SIGN IS IN PLACE

Ensure the Slow Moving Vehicle sign is in place, clean and easily visible.

Ensure the reflectors are in place, clean and easily visible.

SAFETY DECAL LOCATIONS

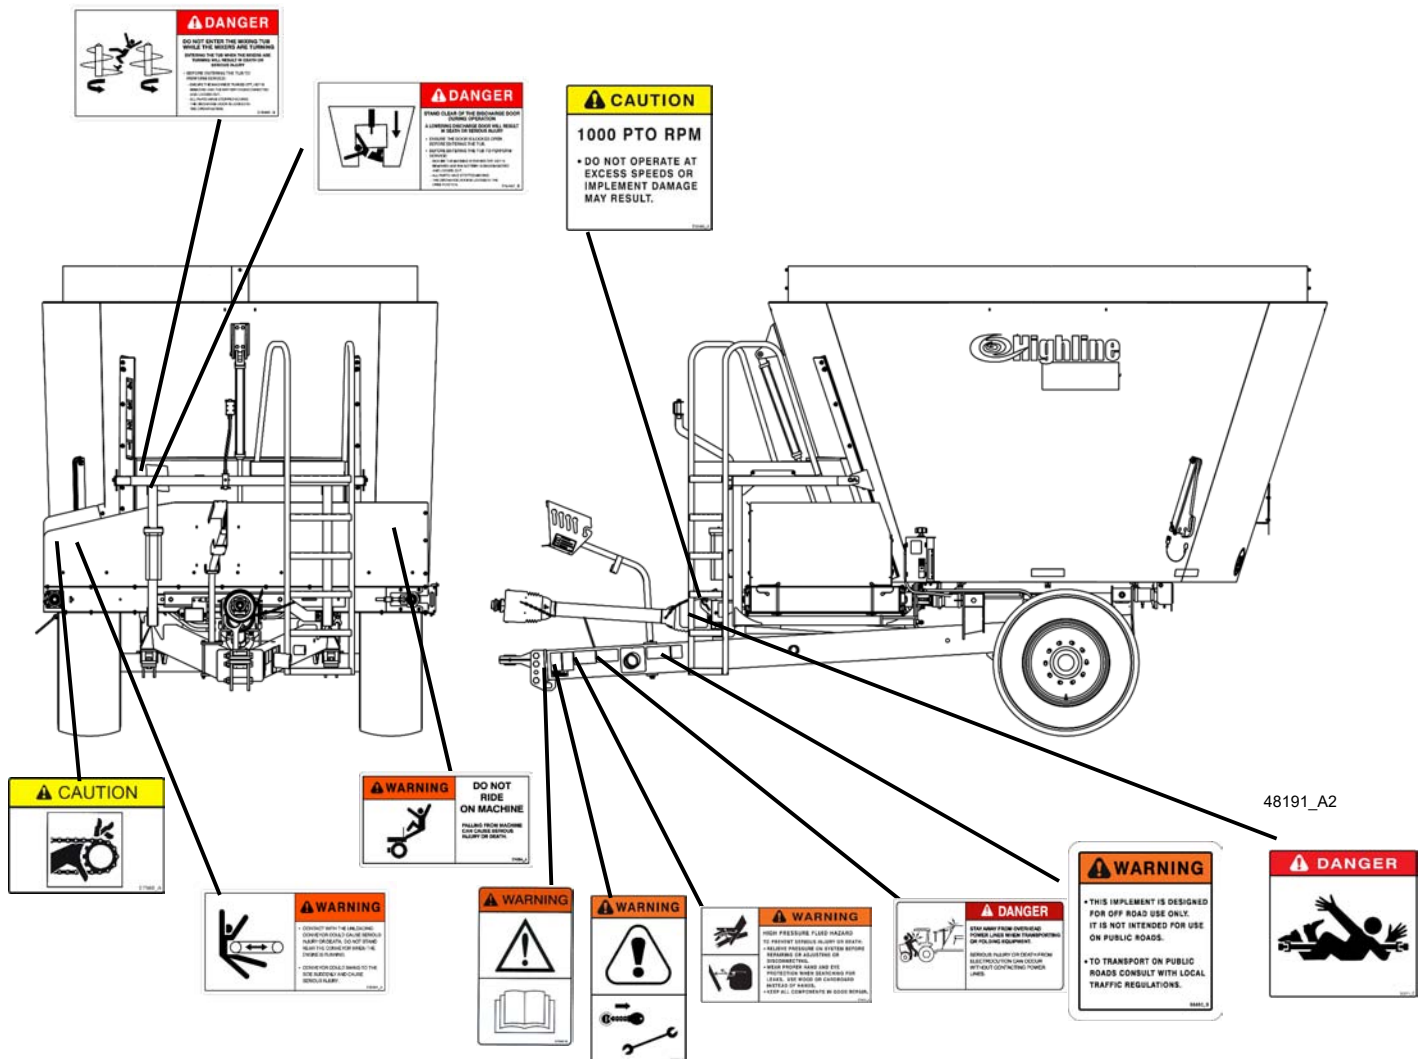

TRANSPORTING THE AMX520T



Only tow an unloaded AMX520T on public roads behind a properly sized and equipped tractor that has a weight of 15,900 lbs (7,212 kg).

Do not tow behind a truck or other type of vehicle.

Check with local traffic regulations to transport on public roads.



Stay away from overhead power lines when transporting equipment. Electrocution can occur without contacting power lines.



Do not allow any person to ride on the tractor or AMX520T. Falling off can result in serious injury or death.



Section 2 - Transporting the AMX520T

1. Tractor Requirements

- Roll Over Protection System (ROPS)
- Working seatbelts
- 1-3/8" 21 spline PTO
- PTO requirement
 - Refer to the "Specifications" Section for the PTO requirements.
- 2 Spool Control Valves (SCV)
- Minimum 120 hp (97 Kw).
- To transport an unloaded AMX520T on public roads at 20 mph (32 km/h) use a properly sized and equipped tractor with a weight of 15,900 lbs (7,212 kg).


2. Ensure the correct PTO speed.

- Ensure that the tractor PTO speed matches the AMX520T's gearbox speed of 1000 rpm.
- Do not attempt to operate the AMX520T at a different PTO speed.



3. Adjust the tractor drawbar length.

- Set the drawbar length to 16" (406 mm) for a 1-3/8" 21 spline PTO,
- This length of the drawbar is measured from the tip of the PTO shaft end to the center of the drawbar hole. (Refer to your tractor's operator manual for drawbar adjustment procedures.)

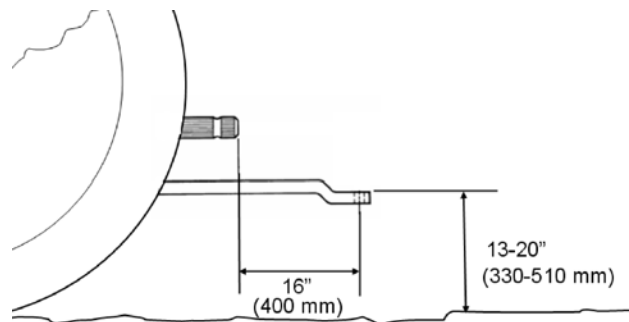

Tractor Drawbar Adjustment - 1 3/8" PTO

PTO Dimensions 1-38

Note: To prevent damage to the tractor drawbar, avoid traveling at high speeds and over rough terrain.

Section 2 - Transporting the AMX520T

4. Lift the hitch.

- Lift the hitch with the jack.
- The hitch is heavy. Do not attempt to lift it without using the jack.



Lift Hitch with the Jack

224199

5. Connect the hitch to the tractor drawbar.

- Use a 1-1/2" (25 mm) pin.
- Secure with a hitch pin clip.

Note: If using a 1-1/4" hitch pin, use the 1-1/4" bushing that came with the machine (stored in the document holder).



Connect Hitch and Safety Chain

224203

6. Connect the safety chain.

- Ensure the safety chain rating is equal or greater than the gross weight of the AMX520T.
- Route the safety chain around the safety chain bolt.
- Attach the chain to a secure location on the tractor.
- Fasten the chain hook with the hook lock.

Section 2 - Transporting the AMX520T

7. Attach the driveline to the PTO.



Shut off the tractor engine before attaching the PTO driveline. Entanglement in the rotating driveline can cause serious injury or death.



The AMX520T shall not be operated without the driveline shields in place.



- Shut off the tractor engine and remove the key.
- Check that the driveline telescopes easily and that the shields are in good condition and rotate freely.
- Lift the tractor PTO shield.
- Support the driveline, pull back on the yoke collar, align the splines by rotating the AMX520T driveline and push the driveline into the tractor PTO shaft until the collar snaps into place.
- Push and pull the yoke several times to ensure the driveline is locked. Do not pull on the collar as this will release the lock.
- Lower the tractor & hitch PTO shields into place.



Connect the Driveline to PTO

224204



Lower the PTO Shield

224198

Section 2 - Transporting the AMX520T

8. Connect the chains on the driveline guards to stationary points at right angles to the rotation of the driveline.
9. Fold down the PTO support holder.
 - Failure to fold down the support may result in damage to the driveline.
10. Attach the hydraulics.
 - Clean the end of the hoses and the connection.
 - Firmly push the hoses into the tractor receptacle according to user preference.
 - Route the hoses so they do not interfere with moving parts.
11. Connect the tractor connection.
 - Connect to the appropriate tractor receptacle.
 - Ensure the cable does not interfere with or contact moving parts.
12. Place the hitch jack in the storage location on the frame.



Attach Hydraulics and Tractor Cable

108008



Hitch Jack in Storage Location

222218

Section 2 - Transporting the AMX520T

13. Check the condition of the tires.

14. Check the tire pressure.

- For 445/50R22.5 tires, fill the tires to 97 psi (669 kPa).



Check the Tires

224085

15. Check the wheel nut torque.

- Ensure that the flat portion of the wheel stud washer is against the wheel rim.
- Torque the lug nuts to 330 - 375 lbft (447 - 508 Nm).



Flat of Washer Against Rim, Torque the Nuts

217100

16. Ensure the tub door is closed.



Ensure the Tub Door is Closed

222221

Section 2 - Transporting the AMX520T

17. Turn off the screws when the tub is empty.



Turn Off Screws When Tub Is Empty

224178


18. Turn off the unload conveyor.



Turn Off the Conveyor
(Dog Leg Conveyor Shown)

222223

19. If the flip up conveyor is installed, fasten the flip up conveyor transport lock.
 - Remove the transport lock pin (1) from the storage location on the lock bracket (3).
 - Insert the lock pin (1) through the lock bracket (3) and into the flip up arm (2).

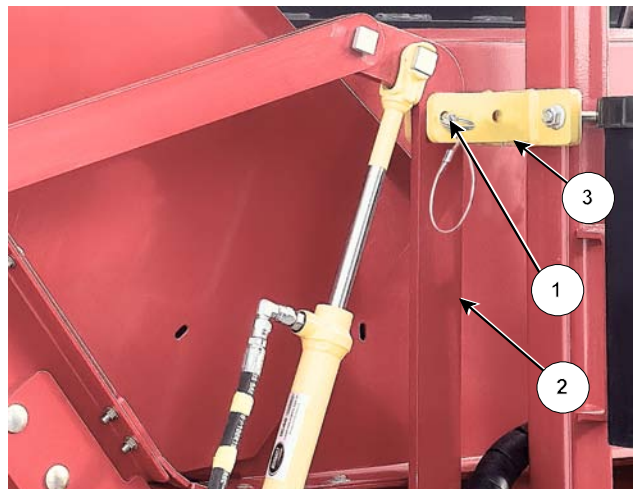

Lock the Flip Conveyor into Transport Position

224087C

Section 2 - Transporting the AMX520T

20. Ensure that the Slow Moving Vehicle (SMV) sign is clean and visible.

21. Transport



Do not tow behind a truck or other type of vehicle.

Check with local traffic regulations to transport on public roads.

- Do not exceed 20 mph (32 km/h).
- Only tow an unloaded AMX520T on public roads behind a properly sized and equipped tractor that has a weight of 15,900 lbs (7,212 kg).



Ensure the SMV is Visible

222220

PREPARING THE AMX520T

1. Park the tractor and AMX520T on level ground.
 - Engage the tractor parking brake and shut down the tractor.




Park on Level Ground

224182

2. Adjust the height of the mixer hitch tongue so that the mixer is level.
 - Use the following pictures for an indication of where to set the mixer tongue according to the height of the tractor drawbar.


- For a tractor drawbar that is 17" - 20" from the ground, set the tongue to be in the 1st and 2nd holes from the top.
 - Place the safety chain connection in the bottom hole.

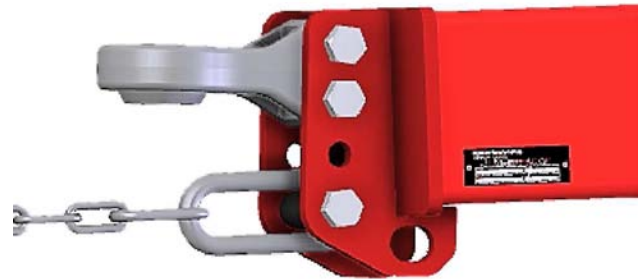

Tongue Set for Tractor Drawbar 17" - 20" from the Ground

224205

- For a tractor drawbar that is 17" or lower from the ground, set the tongue to be in the 2nd and 3rd holes from the top or whatever is required to level the machine.
 - Place the safety chain connection in the bottom hole.
- Fasten the tongue in place and torque the bolts to 210 ft-lbs (285 Nm).

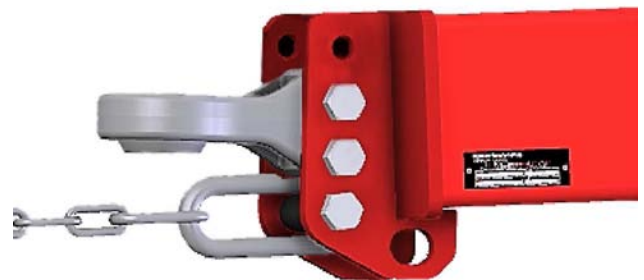

Tongue Set for Tractor Drawbar 17" or Lower from the Ground

224206

Section 3 - Preparing to Use the AccuMix AMX520T

3. Connect the safety chain to the tractor.

- Ensure the safety chain rating is equal or greater than the gross weight of the AMX520T.
- Fasten the safety chain with the safety chain bolt (1).
- Attach the chain to a secure location on the tractor.
- Fasten the chain hook with the hook lock (2).



Connect Safety Chain

224203C

4. Attach the driveline to the tractor PTO.



Shut off the tractor engine before attaching the PTO driveline. Entanglement in the rotating driveline can cause serious injury or death.



The AMX520T shall not be operated without the driveline shields in place.

- Shut off the tractor engine and remove the key.
- Check that the driveline telescopes easily and that the shields are in good condition and rotate freely.
- Lift the tractor PTO shield.
- Support the driveline, pull back on the yoke collar, align the splines by rotating the AMX520T driveline and push the driveline into the tractor PTO shaft until the collar snaps into place.



Section 3 - Preparing to Use the AccuMix AMX520T

- Push and pull the yoke several times to ensure the driveline is locked. Do not pull on the collar as this will release the lock.
- Fold down the PTO support holder.
 - Failure to fold down the support may result in damage to the driveline.
- Lower the tractor & hitch PTO shields into place.
- Connect the chains on the driveline guard to stationary points at right angles to the rotation of the driveline.



Connect the Driveline to PTO

224204



Lower the PTO Shield

224198

5. If the optional 2 speed gearbox is present, check the oil level in the gearbox.
- Check that the oil is showing in the sight glass (3).
 - If the oil is not showing in the sight glass, refer to Section 5 "Maintenance" for information on filling the gearbox with oil.



Check the Oil Level in the Optional 2 Speed Gearbox

224173C4

Section 3 - Preparing to Use the AccuMix AMX520T

6. Inspect all the hydraulic motors, cylinders and hoses.



Use a piece of cardboard or heavy paper to check for leaks. Do not use your hand. Wear proper hand and eye protection when searching for leaks.

Relieve pressure on the hydraulic system before repairing, adjusting or disconnecting.

- Visually inspect all the hydraulic hoses and fittings.
 - See Section 5 "Maintaining" for conditions indicating that replacement is needed.

7. Visually check that the tub does not have any build up or foreign material in it.



Do not enter the tub while the mixers are turning.

Entering the tub when the mixers are turning will result in death or serious injury.

Do not lean over the mixing tub while the screw is turning to avoid the danger of falling into the tub.

Do not enter the tub with material in the tub. The material is unstable and may cause entrapment. There is no means of exiting the tub when the tub is full.

8. Visually check that the screw is in good condition.



Check All Hydraulics


223192



Check for Build Up in the Tub and the Condition of the Screw

224178

9. Check the condition of the knives installed on the screw.

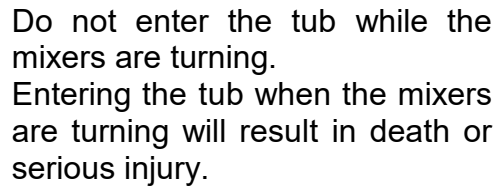

- Note: See Section 5 "Maintenance" for more information on the knives.



224178

-

224088

Section 3 - Preparing to Use the AccuMix AMX520T

11. Check that the front unloading tub door works.

- Extend and retract the door cylinder to check for easy movement of the door.



Check the Front Tub Door Works


219265

12. Take precautions if it is required to enter the tub.




Stand clear of the discharge door during operation.

A lowering discharge door will result in death or serious injury.



- Ensure all parts have stopped moving before entering an empty tub to perform service.
- Raise the tub door.
- Support the door (1) with a piece of wood or other support to ensure that the door does not close causing entrapment.

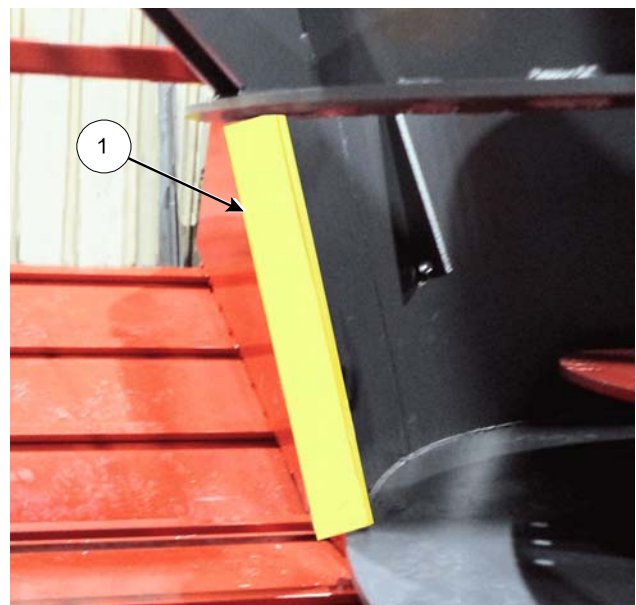

Raise and Support the Tub Door

223189C

13. Check that the unload conveyor operates and moves freely.



Check that the Unload Conveyor Works

222309


14. Clean out any material on the bottom of the conveyor.



Keep body and clothing away from moving parts to prevent serious injury or death.




- Remove the spring pins (1) from the two shield retainers (2)
- Remove the shield retainers (2) from the clean out door (3).
- Remove the clean out door (3).
- Clean the conveyor chain sprockets (4).
- Use compressed air or a broom to remove any material located on the spill guard sheet that is under the conveyor.
- Place the clean out door (3) back into position.
- Replace the two shield retainers (2).
- Fasten the shield retainers (2) with the spring pins (1).

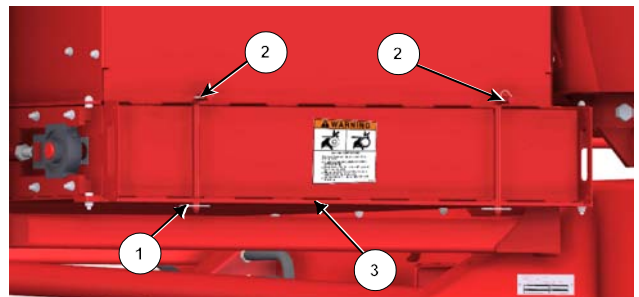

Clean the Conveyor Spill Collector

222247C

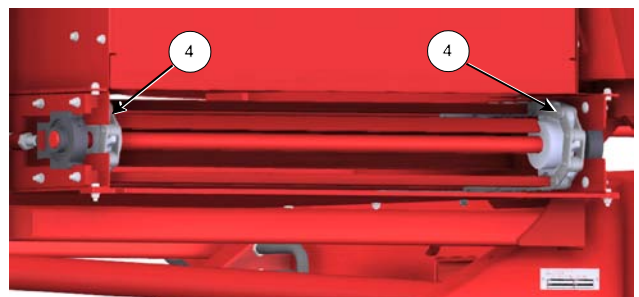


Clean the Conveyor Sprockets

222248C

Section 3 - Preparing to Use the AccuMix AMX520T

15. If the flip up conveyor or the dog leg conveyor option is installed, check that the pivot points (1) on both sides are clear of debris.

- Check there is no debris lodged in the chains.

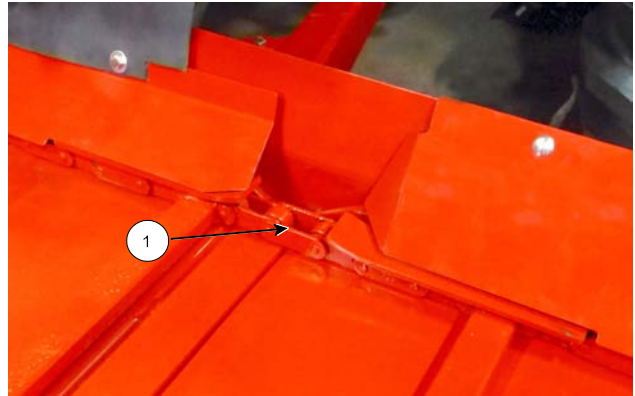


Check the Flip Up/Dog Leg Conveyor is Free of Debris

220200C

16. If the flip up conveyor is installed, remove the conveyor transport lock.

- Remove the lock pin (1) that is through the lock bracket (3) and the flip up arm (2).
- Place the transport lock pin (1) into the storage location of the lock bracket (3).

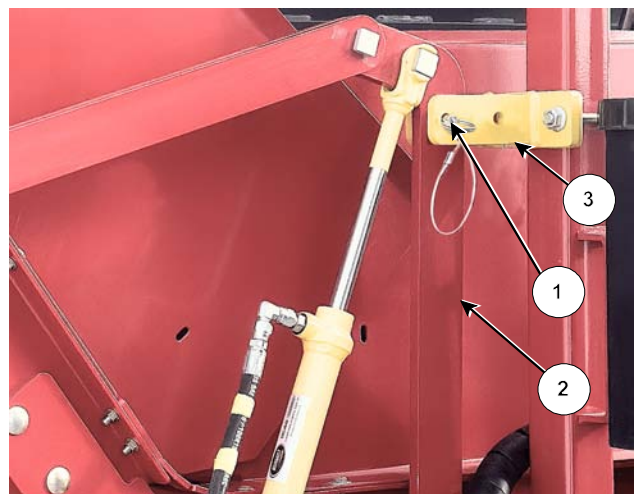

Remove the Flip Conveyor Lock

224087C

17. On the flip up conveyor check that the end of the conveyor raises/lowers for bunk height adjustment.

- Operate the hydraulic cylinder to move the bunk arm.



Stay clear of the flip up unload conveyor when it is lowering. Crushing could cause serious injury or death.



Check that Flip Up Conveyor Raise/Lowers

224181

Section 3 - Preparing to Use the AccuMix AMX520T

18. Check that the mixing screw in the tub operates normally.

- The mixing screw must be able to turn before loading any material.



Do not enter the tub while the mixers are turning.

Entering the tub when the mixers are turning will result in death or serious injury.

Do not lean over the mixing tub while the screw is turning to avoid the danger of falling into the tub.

Do not contact the rotating screw.



Check that the Mixing Screw Turns

224178

19. Check the oil level for the mixing screw drivebox.

- The oil level indicator located on the left side of the tub.
- Check the level when the oil is cold.
- Check the oil level when the machine is level.
- Refer to the decal for where the oil level should be in the sight glass.
- See Section 5 "Maintenance" for filling procedures.



Check the Oil Level for the Mixing Screw

224184

Section 3 - Preparing to Use the AccuMix AMX520T

20. Check the condition of the tires.
- Check that the tire sidewalls and treads are in good condition.

Air Pressure

- For 445/50R22.5 tires, fill the tires to 97 psi (669 kPa).

21. Torque the wheel nuts.
- Ensure that the flat portion of the wheel stud washer is against the wheel rim.
 - Torque the lug nuts to 330 - 375 lbft (447 - 508 Nm).



Check the Tires

224085



Flat of Washer Against Rim, Torque the Nuts

217100

22. Check that the weigh scale display is working.
- Refer to the Weigh Scale Manual for Information.

Note: The power for the display comes from the display connection located on the tractor cable.

Note: For the calibration procedure of the weigh scale See Section 5 "Maintenance".



Check the Weigh Scale Monitor Is Working

222226

Section 3 - Preparing to Use the AccuMix AMX520T

23. If the optional second weigh scale display is present, check that it is working.



Optional Second Weigh Scale

222274

24. If the optional tub camera or remote backup camera is present, check that the camera display is working.
- Check the camera display for a clear image.



Optional Camera Display

222246

25. Lubricate all grease fittings. See Section 5 "Maintenance".
26. Ensure all fasteners are tightened.

This Page Left Blank

Operating the AMX520T

Cutting and Mixing - General Considerations

Note: It is highly recommended to consult with a feed nutritionist when planning the rations, the mixing time and cut length. A feed nutritionist is able to provide the information needed to optimize the ration mix that is best suited for the herd. Follow the nutritionist's recommendations to ensure the best results with the AccuMix AMX520T.

Note: It is the operator's responsibility to ensure that the materials in the feed mix are suitable for livestock feeding.

The cutting and mixing of materials with the AccuMix AMX520T will differ with the various feeds and the weather conditions. Mixing times will vary depending on the mix of materials. Follow the nutritionist's recommendations for mixing times to ensure the best results with the AccuMix AMX520T.

Mixing beyond a certain amount of time may cause the mix quality to deteriorate. An extended mixing time or a high speed of rotation causes heating of the product because of the contact with the surface of the screw and tub walls.

The ideal mix will be light, fluffy and uniform. Hays and straws will be cut cleanly at short lengths and no clumping of feed will be visible.

The regular use of a particle separator helps to ensure accuracy of the mix.

Loading Materials

1. Close the tub door.
 - Extend the door hydraulic cylinder to move the door down to the closed position.



Ensure Front Tub Door Is Closed 222221

2. Start the mixing screw at an appropriate speed.



Do not enter the tub while the mixer is turning. Entering the tub when the mixer is turning will result in serious injury or death.

3. If the optional two speed gearbox is present:

This option provides a screw speed reduction by 33% when the gearbox is shifted to the low range.

- To shift the gearbox, the tractor PTO must be stopped.
 - The shift lever is located at the gearbox.
- There is also a Neutral position.

Note: Do not operate the tractor PTO driveline while the gearbox is in neutral. The gearbox must be in a gear to have the lower gear turning to provide oil to the upper gear and bearings.



Start the Mixing Screw 222222



Optional Two Speed Gearbox 224147

Section 4 - Operating the AMX520T

4. Load the feeding materials over the edge of the tub.

Note: It is the operator's responsibility to ensure that the materials in the feed mix are suitable for livestock feeding. Wrapping material (twine, net wrap, silage cover or other materials) will be discharged with the feed if not removed prior to processing.



Load Feeding Materials

222343

5. Monitor the weight of material being loaded by watching the weigh scale display.

Note: Refer to the weigh scale manual for information on using the weigh scale monitor.

- Add materials according to the ration recommended by the animal nutritionist.



Monitor Weight of Material Added

222226

6. Before loading bales, remove the twine/wrap or other materials from the bales to prevent from being in the ration mix or becoming entangled in the machine.

Note: Pre-processing the bale material before loading will reduce the cutting time and the mix time.



Remove Bale Wrap Before Loading

222227

Section 4 - Operating the AMX520T

7. Minerals or supplements can be loaded with a machine or with bags/pails from the loading platform.



Do not enter the tub while the mixers are turning. Entering the tub when the mixers are turning will result in death or serious injury.

Note: It is the operator's responsibility to ensure that the materials in the feed mix are suitable for livestock feeding. The mineral/supplement packaging material will be discharged with the feed if the packaging materials are allowed to enter the tub.



Supplements Can Be Added from the Platform 222226

8. When loading from overhead augers or piping, drive under the output so that the material will land near the center of the tub.

- Monitor the weight of material being loaded by watching the weigh scale display.

Note: Refer to the weigh scale manual for information on using the weigh scale monitor.

- Add materials according to the ration recommended by the animal nutritionist.



Loading from Overhead Auger 224185

Driving to the Feeding Site

1. Have the mixing screw turning while driving to the feeding site.
 - The turning screw will completely mix the materials.
 - The turning screw will prevent the load from settling and compacting.

Note: If traveling long distances to the unloading site, be aware that having the screw turning may:

- Cut the material more than desired.
- Cause material to separate out from the mix.
- Consult with the animal nutritionist for the appropriate mixing time.
- If the screw is turned off while traveling, be aware that the load may settle, especially with larger loads.
- Load settling may make it more difficult for the screw to begin rotating again.



Keep the Mixing Screw Turning

224186

2. Adjust the travel speed according to the terrain to maintain control and have the machine stable at all times.

Note: It is the operator's responsibility to decide if the weather, road or ground conditions permit safe operation on a hillside, slope, rough, slick or muddy surfaces.

Unloading the Mix



Stay clear of the unloading conveyor.

Contact with the conveyor could result in death or serious injury.

Keep body and clothing away from moving parts to prevent serious injury or death.

1. If the adjustable optional flip up conveyor is installed, activate the hydraulic cylinder to raise the conveyor to unload into the bunk.



Stay clear of the flip up unload table when it is lowering. Crushing could cause serious injury or death.

2. Start the unloading conveyor before opening the discharge door.

- The speed of the conveyor can be adjusted by adjusting the flow control at the tractor.
- Adjust the speed of the conveyor to suit the unloading requirements.



Raise the Flip Up Conveyor

224181



Start the Unload Conveyor

222309

3. Raise the tub door to control the amount of feed exiting the mixing tub.



Open the Tub Door to Control Flow of Mixed Material

223191

- There are number indications on the side of the tub to give a reference point for how much the tub door is open.



Indications for Door Opening

222224

4. Drive forward to distribute the feed.
5. Control the amount of feed discharged at each feeding spot by adjusting the following:
 - Tub door opening
 - Mixer speed
 - Driving speed



Unload at the Feeding Site

222238

Section 4 - Operating the AMX520T

6. Monitor the scale indicator readings to evaluate the ration distribution to the unloading areas.

Note: Refer to the weigh scale manual for information on using the weigh scale monitor.

7. At the end of feeding, empty any feed remaining in the mixing tub to prevent it from settling and compacting.



Monitor the Feeding Ration with the Weigh Scale Monitor

222226

Maintenance of the AMX520T



Shut down the tractor and remove the key before repairing, servicing, lubricating or cleaning the machine.

Relieve all hydraulic pressure in the hoses. Disconnect the hydraulic hoses from the tractor before going near the machine.



Lubrication - Grease

Lubricate all grease fittings with a quality lithium soap compatible E.P. grease meeting the N.L.G.I. #2 specifications and containing no more than 1% molybdenum disulfide.

- At each grease fitting clean off the fitting before attaching the grease gun.


Every 10 Hours

- Driveline at the tractor
 - 2 points on the driveline at the tractor PTO.
- Driveline to the bearing on the mixer hitch.
 - Raise the driveline shield.
 - 2 points on the driveline at the mixer PTO.



Grease Driveline at PTO

224144C

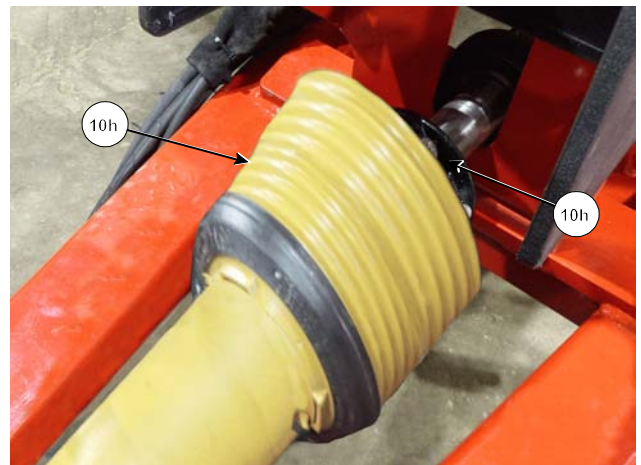


Grease the Driveline at the Mixer

224146C

Section 5- AMX520T Maintenance

- If the optional 2 speed gearbox is installed, grease the driveline going into the gearbox.
 - 2 points on the driveline.

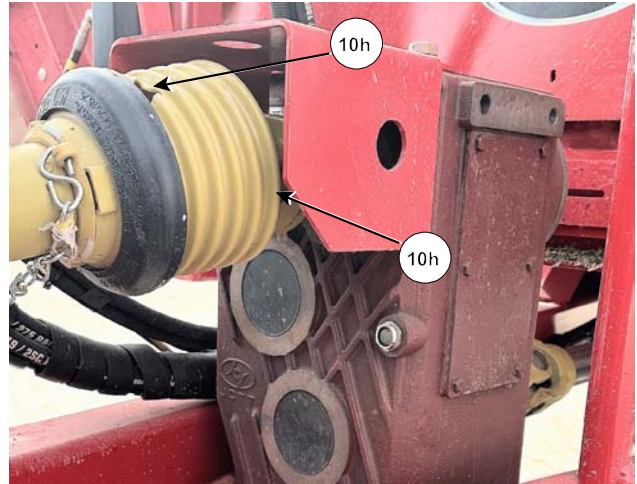


Grease Driveline Going Into the Optional Gearbox

224147C

Every 100 Hours

- Driveline bearing on the mixer hitch.
 - 1 point that is accessed through a hole in the top of the bearing shield.

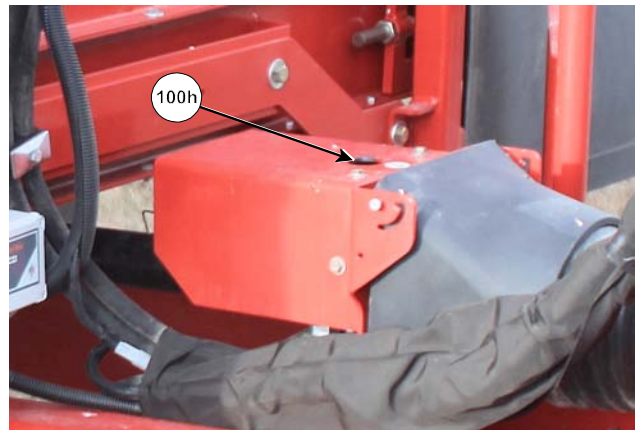

Grease the Driveline Bearing

224145C

- If the optional 2 speed gearbox is installed, grease the driveline going out of the gearbox.
 - 2 points on the driveline.




Grease Driveline Going Out of the Optional Gearbox

224147C2

Section 5- AMX520T Maintenance

- Lubricate 2 bearings at the front of the conveyor.
 - One point through the motor shield on the left of the conveyor.
 - One point on the bearing on the right of the conveyor.

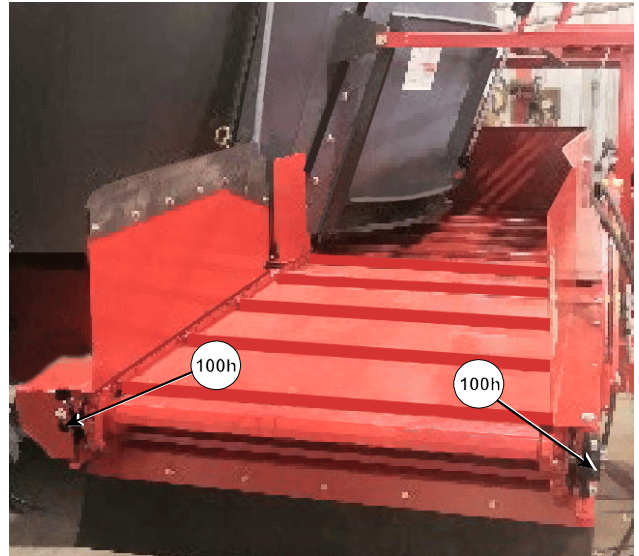

Grease Conveyor Front Bearings
(Flat Conveyor Shown)

222236C


- Lubricate 2 bearings at the rear of the conveyor.
 - One point on each side of the conveyor.



Grease Conveyor Rear Bearings

222252C

- Mixing Screw Driveline
 - 2 points on the joint at the screw drivebox.

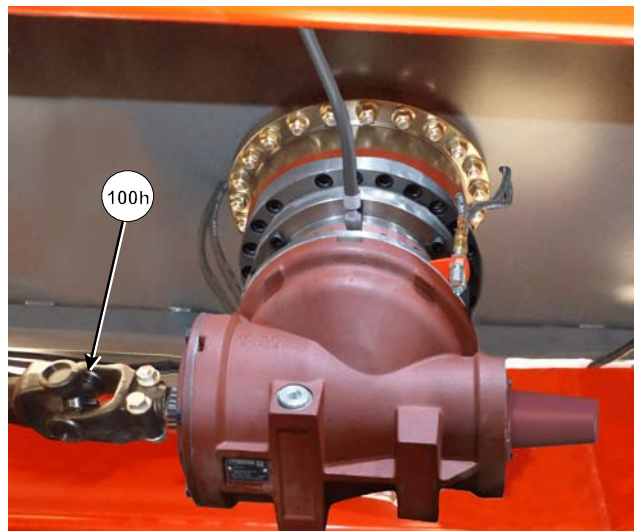

Front Screw Driveline

224187C

Every 500 Hours or Every Year


- Grease the wheel hubs
 - Remove the hub cap to remove the hub bearings and apply grease into the hub and the bearings.

Note: If working in heavy muddy conditions or high moisture then grease move often.
- Change Oil in the Optional 2 Speed Gear Box
 - Drain the oil from the gearbox by removing the drain plug (1) at the bottom of the gearbox.
 - To fill:
 - Replace the drain plug (1).
 - Remove the breather port (2) at the top of the gearbox.
 - Fill with EP220 synthetic oil until the oil is seen in the sight glass (3) on the front side of the gearbox.
 - Fill with approximately 9 liters of oil.



Grease the Single Axle Hubs

224129C

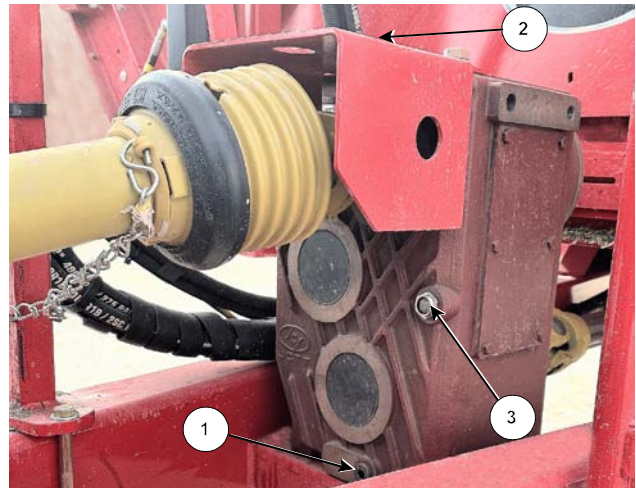


Change the Oil in the Optional 2 Speed Gearbox

224147C3

Once a Year (Annually)

- PTO from Tractor to Mixer
 - Remove the driveline from the tractor to the mixer.
 - Slide the inner and outer sections of the driveline apart into 2 pieces.
 - Place grease on the portion of the driveline that slides into the other portion of the driveline.
 - Slide the two parts of driveline together.
 - Reconnect the driveline to the tractor PTO and to the mixer.

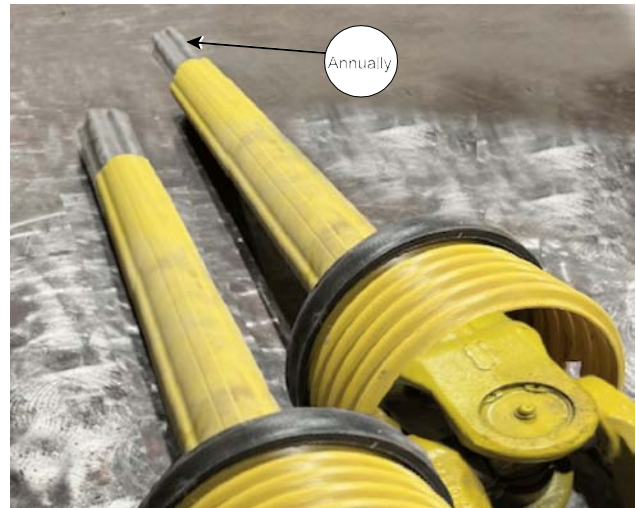

Grease the Sliding Portion of the Tractor Driveline

224130C

Section 5- AMX520T Maintenance

- Driveline from the Hitch Bearing (or 2 Speed Gearbox if present) to the Screw Drivebox.
 - Disconnect the driveline from the hitch bearing (or 2 speed gearbox) to the screw drivebox.
 - Slide the inner and outer sections of the driveline apart into 2 pieces.
 - Place grease on the portion of the driveline that slides into the other portion of the driveline.
 - Reconnect the driveline to the screw drivebox and bearing (or gearbox).



Grease the Sliding Portion of the Driveline to the Screw Drivebox 224131C


Every 2,000 Hours

- Screw Drivebox Top Bearing on the Drivebox.

The drivebox has a remote grease location for the top bearing. There are 2 grease lines at the remote location.

Note: Grease in warm weather and with the gearbox warm for the best flow of grease.


- Use Shell GADUS S2 grease or similar.
- From underneath the mixer, remove the grease line cap (2).
- Apply grease at the grease point (1) using a hand grease gun only.
 - Apply 20 pumps from the hand grease gun.
- Replace the grease cap (2) on the other line.

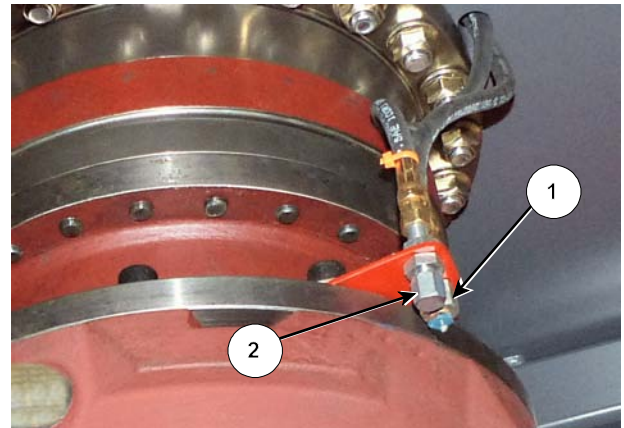

Grease Screw Drivebox Top Bearing 223234C

Mixing Screw Drivebox Oil

- The oil level indicator for the mixing screw gearbox is located on the left side of the tub.
 - The oil level in the sight tube indicates the oil level in the drivebox.
- Compare the oil level in the sight tube to the decal (2).
 - Check the oil level when the machine is cold.
 - Check when the machine is level.

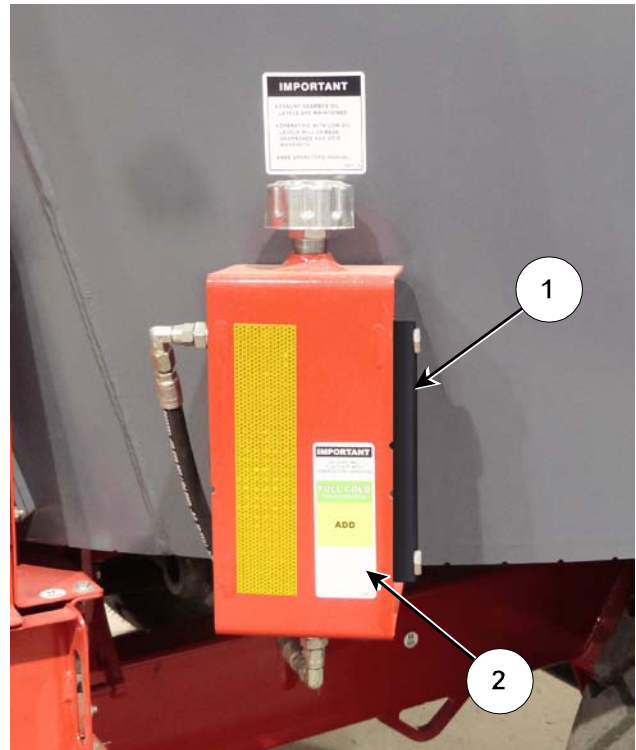

Mixing Screw Drivebox Oil Level

224184C2

To Fill the Drivebox with Oil:

- Remove the oil tank cap of the drivebox.
- Fill with EP220 synthetic oil.

Note: Pour in oil in small amounts while giving time for the oil to run down the hoses into the gearbox and register in the level tube.


- Fill until the oil level in the sight tube is as shown on the decal.

Note: Do not overfill to prevent the breather port of the gearbox from being blocked.

- Replace the oil tank cap.

Draining the Oil in the Screw Drivebox

1. Change the oil in the screw drivebox according to the Maintenance Interval Schedule listed later.
2. Remove the drain plug (4) on the bottom of the drivebox to fully remove all the oil in the drivebox.
 - Catch the oil so it can be disposed of in a proper way.
3. Replace the drain plug.

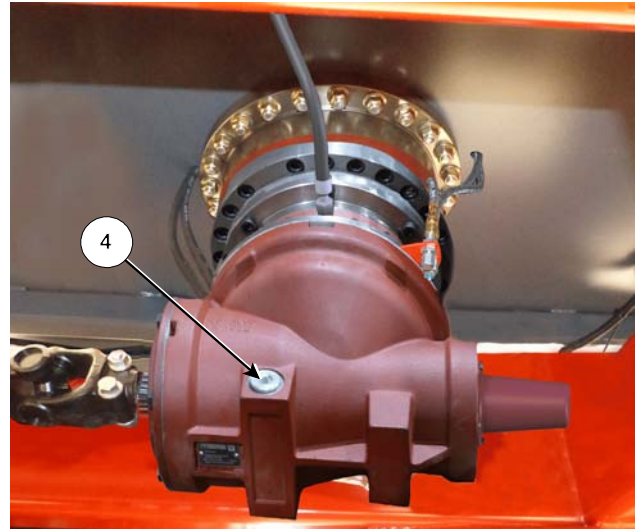


Drain Plug

224182C2

Filling the Screw Drivebox with Oil after Draining

There are 2 methods for filling the screw drivebox with oil. Select one of the methods and follow the instructions.

- Method 1 - Fill by Pumping in Oil Through the Lower Hose
1. Remove the oil cap (1) from the oil tank.
 2. Remove the upper hose (2) of the tank.
 - Place the upper hose into a catch basin or pail located on the ground.
 3. Remove the tank lower hose (3).
 4. Pump EP220 synthetic oil into the lower hose (3) until oil starts to come out of the upper hose (2).
 - Fill with approximately 24 liters of oil.
 5. Reconnect the lower hose (3) to the bottom of the oil tank.
 6. Reconnect the upper hose (2) to the top of the oil tank

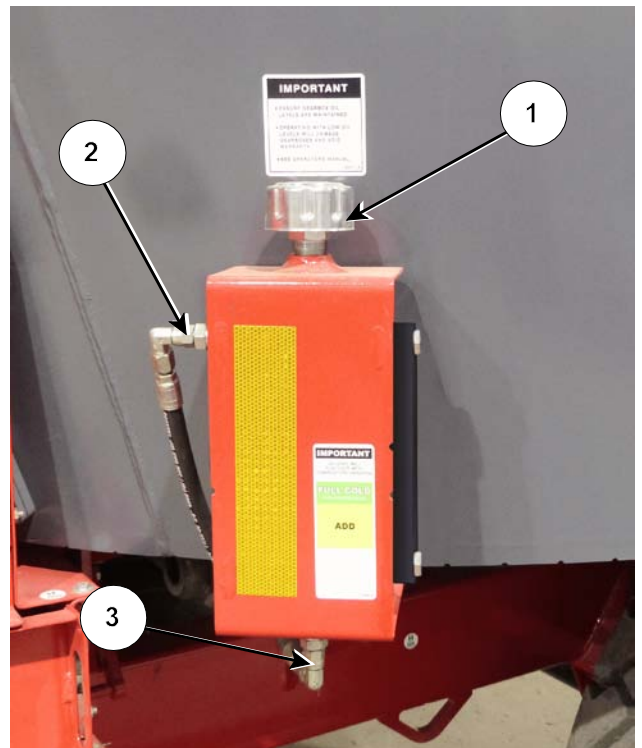

Remove Hoses, Fill , Replace Hoses

224184C

7. Check the oil level in the sight tube.

Note: Do not overfill as that will cause oil to come out of the top breather port of the drivebox.

8. If needed, top up with oil though the top cap to the level indicated on the decal on the oil tank.

9. Place the oil cap (1) back onto the tank.


- Method 2 - Fill Through the Oil tank Cap

1. Remove the oil cap (1) from the oil tank.
2. Slowly add EP220 synthetic oil until the oil is at the top of the sight tube in the oil tank.
3. Wait for the oil to make it's way into the screw drivebox.
4. Repeat the filling and waiting process until the oil level stabilizes in the sight tube at the correct level according to the decal on the oil tank.

5. Replace the oil cap (1) onto the tank.


If the oil tank has been overfilled according the oil level decal:

1. Remove the oil cap (1).
2. Remove the lower hose (3).
3. Drain some of the oil from the tank/drivebox.
4. Check the oil level according to the decal.
5. Replace the lower hose (3).

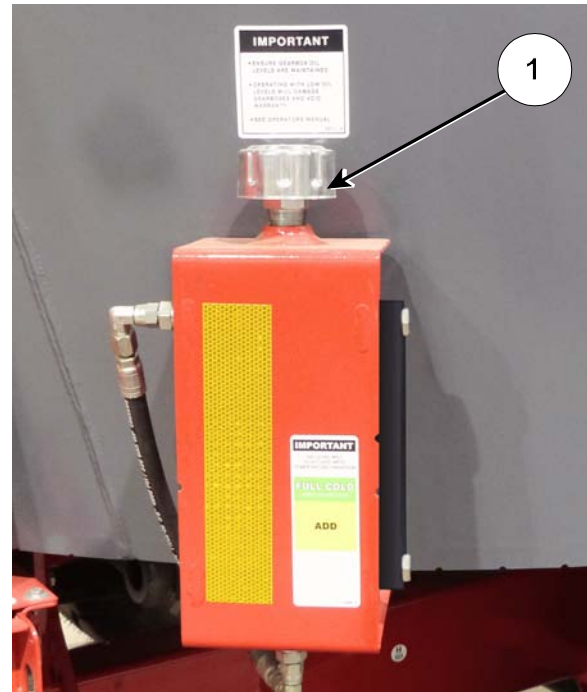

Fill Oil Tank Through the Tank Cap

224184C3

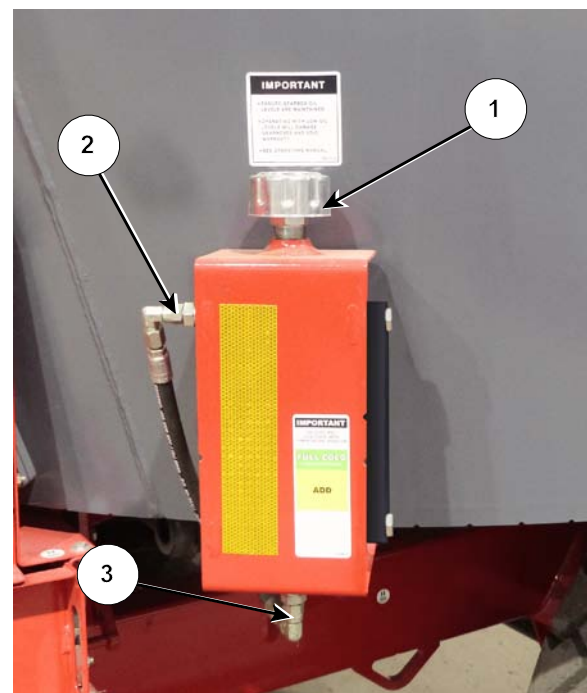

If Tank Has Been Overfilled,
Drain Some Oil

224184C

Wheel Nut Torque

- Ensure that the flat portion of the wheel stud washer is against the wheel rim.
- Torque the lug nuts to 330 - 375 lbft (447 - 508 Nm).



Flat of Washer Against Rim, Torque the Nuts

217100

Tires

- Ensure the machine is on level ground.
- Ensure all tires are chocked.
- Check the tires for low pressure, cuts, bubbles.
- Check that the tire sidewalls and treads are in good condition.
- Check for damaged rims or missing lug bolts and nuts.

Air Pressure

- For 445/50R22.5 tires, fill the tires to 97 psi (669 kPa).
- Have a qualified tire technician service the tires and wheels.



Check the Tires

224085



Explosion hazard!

Do not remove, install, or make repairs to a tire on a wheel rim. Take the tire and rim to a tire shop to have a qualified tire mechanic service the tires and rims. Failure to comply could result in death or serious injury.



Tire Changing Procedure



Before beginning, make sure the tractor is turned off and the parking brake is set.



Securely block the mixer before any work is done around or under the machine.



Relieve hydraulic pressure and disconnect the hydraulic hoses.



1. Hitch the mixer to the tractor.
2. Block the mixer tires on the opposite side to prevent movement of the mixer.
3. Place a jack under the spindle tube of the tire to be changed.
4. Lift the spindle for sufficient clearance to remove the tire.
5. Put the new tire in place.



Place Jack Under the Spindle Tube of Tire to be Changed

224188C

6. Ensure that the flat portion of the wheel stud washer is against the wheel rim.
 - Torque the lug nuts to 330 - 375 lbft (447 - 508 Nm).
7. Fasten the tire with the lug nuts.



Flat of Washer Against Rim, Torque the Nuts

217100

Visually Inspect Hydraulic Hoses/Fittings



The hydraulic system operates under extremely high pressure. Hydraulic oil leaking under pressure can penetrate the skin, causing serious injury or infection.



Shut down the machine and replace the hydraulic hose assembly if any of the following conditions exist:

- Fitting slippage on hose.
- Damaged, cracked, cut or abraded cover (any reinforcement exposed).
- Hard, stiff, heat cracked or charred hose.
- Cracked, damaged or badly corroded fittings.
- Leaks at fitting or in hose.
 - Kinked, crushed, flattened or twisted hose.
 - Blistered, soft, degraded or loose cover.

Visually Inspect the Hydraulic Cylinders

- Shut down the machine and visually inspect the tub door hydraulic cylinder, looking for leaks and/or other damage.
- If hydraulic cylinder damage is found, make all necessary repairs or replace before operating the machine.
- If the optional flip up conveyor is installed, check the cylinder.




Inspect the Hydraulic Cylinder

222269

Adjust the Kicker Plate on the Screw Leading Edge

As the machine mixes material, the kicker plate edge will wear as it lifts material onto the screw.

- For proper mixing the kicker plate should be set to a distance of about 1/8" distance to the tub wall at the closest point (this distance will vary as the screw makes its full rotation).
- To adjust the kicker plate:
 - Loosen the fasteners (1) and slide the kicker plate about 1/8" distance to the tub wall at the closest point.
 - Tighten the fasteners (1) to hold the kicker plate.

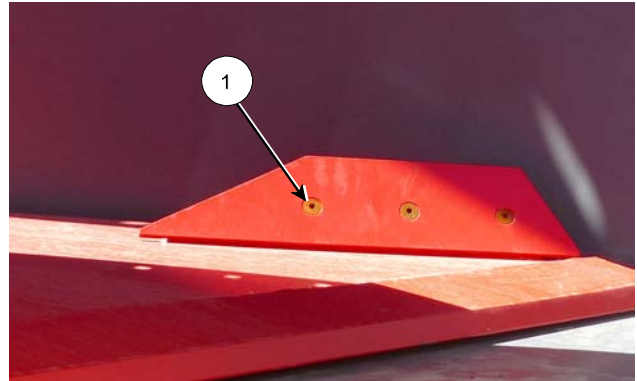

Adjust Kicker Plate to the Edge of the Screw

220138C



Adjust the Screw Sweeper

If the screw sweeper (2) is contacting the tub floor, add shims between the sweeper and screw mount (3) to move the sweeper up for a small clearance from the tub floor.




Do Not Enter the Tub While the Mixers Are Turning.

Entering the tub when the mixer is turning will result in death or serious injury.

Do not lean over the mixing tub while the screw is turning to avoid the danger of falling into the tub.

Do not contact the rotating screw. Never attempt to manually remove debris while the screw is rotating.

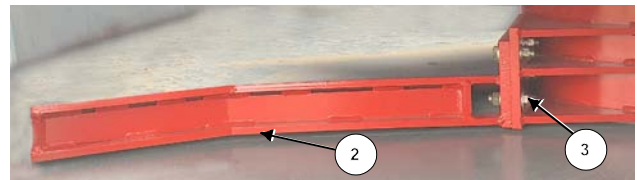

Adjust the Screw Sweeper Clearance

224189C

Knives on the Screw

Knives are installed on the screw. The knives nearer to the base of the screw are subject to the most wear.

- To help with uniform wear, exchange the lower knives with the upper knives.
- Replace the knives when they are worn or are no longer cutting material.



Exchange or Replace the Knives

222267C


Adjusting the Unloading Conveyor Chains

- Check the tension of the chain.
 - Lift the second slat from the rear of the conveyor.
 - The slat should be able to lift 1/4" to 1/2" from the chain bed.
 - If the chain needs to be adjusted, follow the steps listed:
- At the conveyor end, next to the left side of the tub:
 - Remove the conveyor end cap by pulling out the retaining pins.
 - Loosen the locking nut (1) on the tension adjusting bolt.

Note: If the flat conveyor is moved outward to the right then use the supplied special tool to adjust the locking nut and adjustment nut.


Note: Adjust the flip-up conveyor chain tension when the conveyor is in the flat position. The chain tension will decrease when the conveyor is raised.

- Turn the adjusting nut (2).
- Check the tension by lifting the second slat from the rear of the conveyor.
 - Check that it can be lifted 1/4" to 1/2" from the chain bed.
 - Do not over tighten the chain.
- Tighten the locking nut (1).

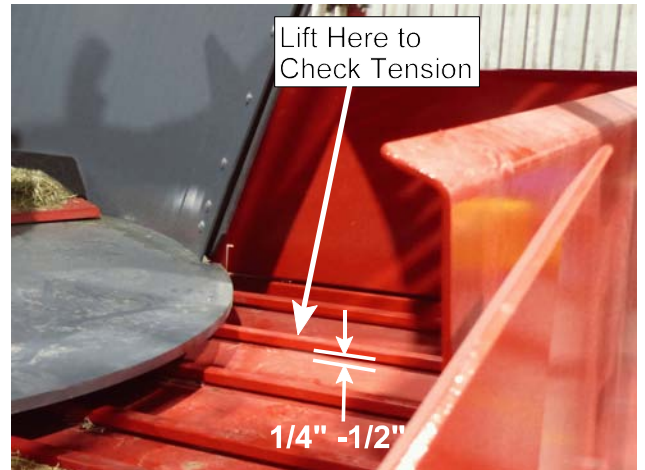

Lift Slat to Check Chain Tension

224207C

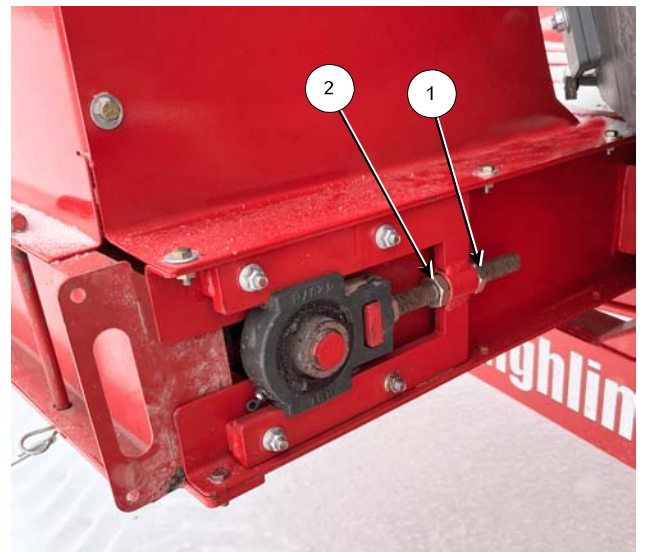


Remove the Conveyor End Cap
Rear Unload Conveyor Chain Tension Adjust

222327C

Section 5- AMX520T Maintenance

- At the conveyor end, next to the front ladder:
 - Loosen the locking nut (1) on the tension adjusting bolt.
 - Turn the adjusting nut (2).
 - Check the tension by lifting the second slat from the rear of the conveyor can be lifted 1/4" to 1/2" from the chain bed.
 - Do not over tighten the chain.
 - Tighten the locking nut (1).
- Replace the conveyor end cap and fasten with the retaining pins.

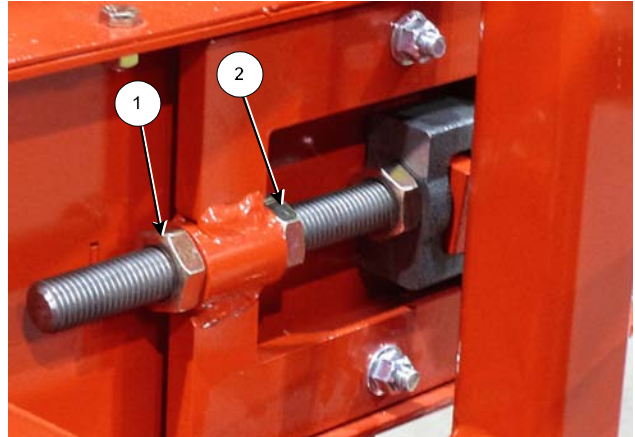

Front Unload Conveyor Chain Tension Adjust 222266C

Recommended Service Interval Chart

Daily
Check Hydraulic Components for Leaking
Check Mixer Screw Oil Level
Remove Trash and Debris
Clean Backup Camera (if present)
Clean Tub Camera (if present)
Every 10 Service Hours
Grease Points on the Input Driveline Shaft
Check Wheels
Check Tire Lug Nuts
Check Tire Inflation
Every 100 Hours
Grease Unload Conveyor
Grease Driveline Hitch Bearing or Optional 2 speed Gearbox driveline (If present)
Grease Screw Drive Shaft
Every 500 Service Hours or Every Year
Check Mixing Screw Gearbox Seals and Screw Tightness
Check Wheels and Bolt Torque
Grease the Wheel Hubs
Grease the Driveline from Tractor to Mixer
Every 2000 Service Hours
Change the Oil in the Mixing Screw Drivebox
Check Tightness of Screws on Mixing Screw Drivebox
Grease the Top Bearing of the Screw Gearbox
Every 5000 Service Hours
Check And/Or Replace the Seals of the Screw Planetary Gearbox

Calibration Procedure for DigiStar/TopCon Display Weigh Scale

DIGISTAR 2805 Calibration Procedure:

- Power On, Wait for it to boot up.
- Push: **Select** Repeatedly until "Setup" Appears.
- Immediately push and hold: **Function** until Setup reappears.
- Type: **145020**
- Push: **On** (then it should say "Storing" so just wait).
- Type: **36931**
- Push: **On**, then it goes back to Displaying Weight.
- Calibration Is complete.
- Scale Is ready to zero.

Max Weight Calibration:

- Push: **Select** repeatedly until "Menu" appears.
- Immediately Push and Hold: **Function** until it starts giving directions.
- Push: **Select** until "Menu 3" Appears.
- Push: **Enter** to Get into Menu 3.
- Push: **Enter** again to skip "Display Unit".
- Push: **Enter** again to skip "Auto Range" Option.
- Push: **Enter** again to skip "Display Unit Lb-kg" or **Select** then On to Modify.
- Cap Will Be Shown Now.
- Type: **30000**
- Push: **On** to Save.
- Push: **Off**

DIGISTAR 2810 Calibration Procedure:

- Power On
- Type: **8711**
- Push: **Select**
- Type: **145020**
- Push: **Enter**
- Type: **8712**
- Push: **Select**
- Type: **36931**
- Push: **Enter**
- Type: **3002**
- Push: **Select**
- Type: **30000** (To Enter 30000 Lb Max Capacity)
- Push : **Enter**
- Calibration Is Complete.
- Scale Is Ready to Zero.

Calibration Procedure for Dinamica Generale DG500 Weigh Scale

1. Turn on the weigh scale.
2. Hold down Enter as soon as it says on the screen to "Hold Enter" to get into Setup.
3. At the System Configuration screen choose option 6, "Setup Protected by Password".
4. Use up/down arrows to Enter password 12.
5. Confirm with the Enter key.
6. Use the up/down arrows to change the calibration number to 7680.

CALIBRATION NUMBER = LOAD CELL CAL (1920) X
NUMBER OF CELLS (4) =7680

7. Press Enter to confirm the entered value.



To Fine Tune the Weight on Dinamica Generale DG500 Weigh Scale:

1. Turn on the weigh scale.
2. Hold down Enter as soon as it says on the screen to "Hold Enter" to get into Setup.
3. At the System Configuration screen choose option 6, "Setup Protected by Password"
4. Enter password 67.
5. Confirm with the Enter key.
6. Use the up/down arrows to change the adjustment factor percentage.
7. Press Enter to confirm the entered value.



Refer to the manual that came with the display for additional information on operating the display.

This Page Left Blank

Section 6 - Storing the AMX520T

Storing the AMX520T

1. Clean all the debris off the machine.



Clean Debris from the Machine

224182

2. Remove all material that is inside the tub.



Remove all Material from the Tub

224178

4. Place the jack onto the hitch.
 - Remove the jack from the storage position.
 - Pin the jack in place on the hitch.
 - Ensure that the jack is resting on solid level ground or resting on a wood block.
 - Raise the hitch until the weight is supported by the jack.
 - The hitch is heavy. Do not attempt to lift it without using the jack.



Lift Hitch with the Jack

224208

Section 6 - Storing the AMX520T


5. Raise the tub door a small amount to let any water that collects to drain out from the tub.
 - Support the tub door so it does not lower.
6. Remove the driveline from the tractor PTO shaft.
 - Disconnect from the tractor the chain on the driveline guard.



Disconnect the Driveline from the Tractor

224204

7. Place the driveline into the driveline support (1).

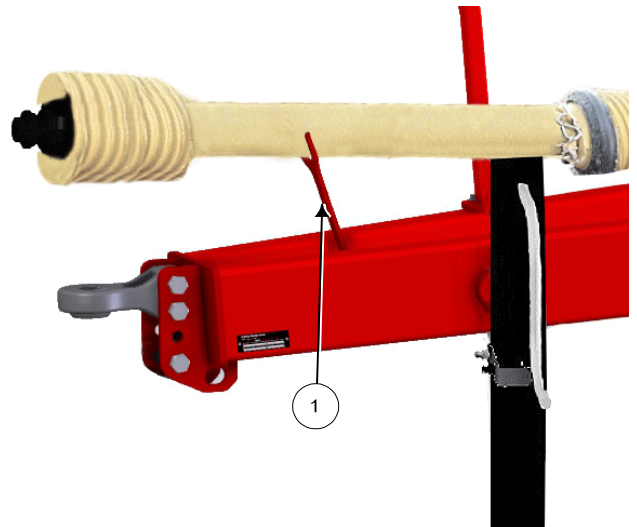

Place the Driveline into the Driveline Support

224209

Section 6 - Storing the AMX520T


8. Disconnect the safety chain from the tractor.
9. Remove the hitch pin from the tractor.



Disconnect Safety Chain from Tractor
Remove the Hitch Pin

224203

10. If the flip up conveyor is installed, move the conveyor upward and fasten the flip up conveyor transport lock.
 - Remove the transport lock pin (1) from the storage location on the lock bracket (3).
 - Insert the lock pin (1) through the lock bracket (3) and into the flip up arm (2).

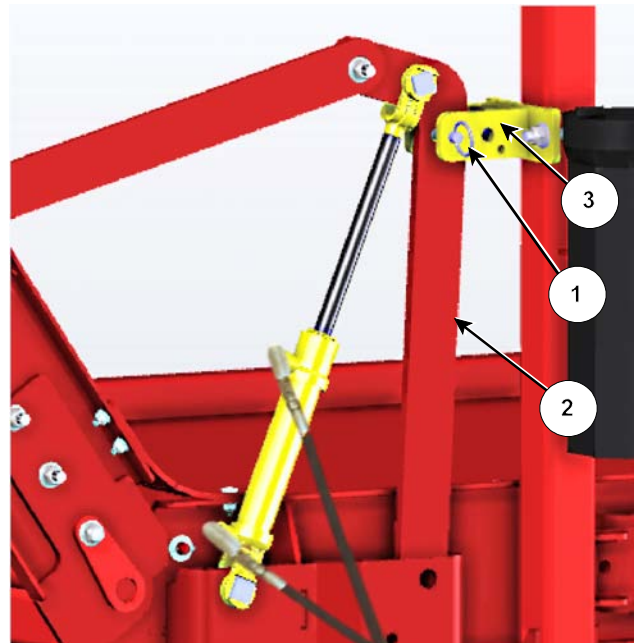

Lock the Flip Conveyor into Transport Position

223235C

11. Relieve the pressure on the hydraulic hoses and disconnect them.
12. Disconnect the electrical connection.



Disconnect Hydraulic Hoses & Electrical

108008

Section 6 - Storing the AMX520T

13. Secure the hydraulic hoses and electrical connector to the hose holder to keep them clean and off the ground.



Place Hydraulic Hoses and Electrical Connector Into the Holder

224190

14. Tighten all bolts to the recommended torque.
15. Check the machine for worn and damaged parts. Replace as needed.
16. Touch-up the paint to prevent rusting.

Troubleshooting

Mixing Screw

Symptom	Problem	Solution
Screw will not start or it stops during operation	Load is heavy material	Load less material in the tub.
Screw not cutting material	Aggression Bars	Move the aggression bars into the tub for more material cutting.
	Knives	Knives are dull. Exchange the lower knives that get more wear with the upper knives. Replace with new knives.
PTO and screw not turning	Driveline shear bolt	Replace shear bolt on drive line
Rear Mixing Screw Not Turning	Screw Driveline	Check that the driveline from the front mixing screw drivebox is connected to the rear mixing screw drivebox.

Unload

Symptom	Problem	Solution
Tub door does not open	Hydraulic cylinder	Check hydraulic connections
Unload conveyor does not turn	Hydraulic motor	Check the hydraulic connections at the motor.
	Material caught in the conveyor chains	Remove material from the chains.
	SCV not supplying enough hydraulic flow	Increase the flow rate at the SCV
Material spills over sides of conveyor	Too much material released from tub	Control the amount of material coming from tub by controlling the tub door.
Not enough material comes out of tub door	Mixing Screw Speed	Increase the speed of the mixing screw to move more material out.

Section 7 - AccuMix AMX520T Troubleshooting

Optional Flip Up conveyor does not lift	Hydraulic Cylinder	Check the connections to the hydraulic lift cylinder.
	Transport Lock	Remove the transport lock to allow the conveyor to be raised or lowered.

Weigh System

Symptom	Problem	Solution
Weigh scales do not show correct weight	Connection to the weigh bar	Check for good wire connections at all 4 weigh bars.
	Calibration of the weigh scales	Follow the scale calibration procedure as indicated in the in Section 5 of this manual. For additional information see the Weigh Scale Operator manual.

Section 8 - Accumix AMX520T Specifications

Machine Specifications

Tub		
Capacity	451 ft ³	12.7 m ³
With tub extension	520 ft ³	14.7 m ³
Number of Screws	1	
Screw Speed	39 rpm @1000 PTO	
Aggression Plates	Yes	
Weigh System	4 Point Weighing System	

Dimensions and Weights		
Unloaded Weight (with flat conveyor)	10,600 lb.	4,818 kg
Unloaded Tongue Weight	1,100 lb.	500 kg
Max Payload	14,040 lb at 20 mph	6,382 kg at 32 kph
Length	227 in.	5.77 m
Height Standard	117 in.	2.97 m
Height with Extension	127 in.	3.23 mm
Width with Flat Conveyor	109 in.	2.77 m
Wheel Track Width	100 in.	2.54 m

Unloading		
Conveyor	Chain with Steel Slats	
Unload Height		
Flat Conveyor	32 in.	813 mm
Dogleg Conveyor	46 in.	1168 mm
Folding Conveyor	32 - 56 in.	813 - 1422 mm
Unload Door Width	58 in.	1473 mm

Section 8 - Accumix AMX520T Specifications

Drivetrain		
Minimum HP	120 hp	90 kW
Drivetrain		
From Tractor	CAT 6 PTO, Constant Velocity Shear Protection, 1000 RPM 1-3/8"-1-3/4"	
From Steady Bearing (or 2 Speed Gearbox)	CAT 6 PTO, Shear Protection, 1000 RPM 1-3/4"-1-3/4"	
Tires	445/50-22.5	
Tire Pressure	97 psi (669 kPa)	
Suspension	Single Axle, HD 10 Bolt Hubs	

Note: Right/left hand is determined by sitting in the tractor looking forward.

Highline New Equipment Limited Warranty Policy

One (1) Year / 12 Months - Parts and Labour

Highline Manufacturing (hereinafter "Highline") warrants this new product of Highline's manufacturer to be free from defects in material and workmanship, under normal use and service for one (1) full year after initial purchase/retail sale. Highline will warrant its product for one (1) year parts and labor, if performed by a qualified Dealer. This Limited Warranty shall apply only to complete machines of Highline's manufacture. Parts are covered by a separate Limited Warranty.

EQUIPMENT AND ACCESSORIES NOT OF HIGHLINE'S MANUFACTURE ARE WARRANTED ONLY TO THE EXTENT OF THE ORIGINAL MANUFACTURER'S WARRANTY AND SUBJECT TO THEIR ALLOWANCE TO HIGHLINE ONLY IF FOUND DEFECTIVE BY SUCH MANUFACTURER.

During the Limited Warranty period specified above, any defect in material or workmanship in any warranted item of Highline Equipment not excluded below shall be repaired or replaced at Highline's option without charge by any authorized independent Highline Dealer. An authorized Dealer must make the warranty repair or replacement. Labour is paid in accordance with Highline's Labour reimbursement policy. Highline reserves the right to supply remanufactured replacement parts as it deems appropriate.

RETAIL PURCHASER RESPONSIBILITY

This Limited Warranty requires proper maintenance and periodic inspections of the Equipment as indicated in the Operator's Manual furnished with each piece of new Equipment. The cost of routine or required maintenance and services is the responsibility of the retail purchaser. The retail purchaser is required to keep documented evidence that these services were performed. This Highline New Equipment Limited Warranty may be subject to cancellation if the above requirements are not performed.

EXCLUSIONS AND LIMITATIONS

The warranties contained herein shall NOT APPLY TO:

1. Any defect which was caused (in Highline's sole judgement) by other than normal use and service of the Equipment, or by any of the following:
 - a. accident
 - b. misuse or negligence
 - c. overloading
 - d. of reasonable and proper maintenance
 - e. improper repair or installation
 - f. unsuitable storage
 - g. non-Highline approved alteration or modification
 - h. natural calamities
 - i. vandalism
 - j. parts or accessories installed on Equipment which were not manufactured or installed by Highline authorized Dealers
 - k. the elements
 - l. collision or other accident.
2. Any Equipment whose identification numbers or marks have been altered or removed.
3. Any Equipment which any of the required or recommended periodic inspection or services have been performed using parts not manufactured or supplied by Highline or meeting Highline Specifications including, but without limitation, lubricants (oil, grease), belt lacings, and hydraulic fluids.

4. Any Equipment used in demonstrations not performed by a Highline Dealer. Warranty will be at the discretion of Highline for all other demonstration warranty.
5. New Equipment delivered to the retail purchaser in which the warranty registration has not been completed and returned to Highline within ten (10) days from the date of purchase.
6. Any defect that was caused (in Highline's sole judgement) by operation of the Equipment not abiding by standard operating procedures outlined in the Operator's Manual.
7. Tire Limited Warranties and support are the responsibility of the respective product's manufacturer.
8. Transportation costs, if any, of transporting to the Highline Dealer.
9. In no event shall Highline's liability exceed the purchase price of the product.
10. Highline shall not be liable to any person under any circumstances for any incidental or consequential damages (including but not limited to, loss of profits, out of service time and damage to equipment which this equipment may be attached) occurring for any reason at any time.
11. Diagnostic and overtime Labour premiums are not covered under this Limited Warranty Policy.
12. Depreciation damage caused by normal wear, lack of reasonable and proper maintenance, failure to follow operating instructions, misuse, and/or lack of proper protection during storage.
13. Accessory systems and electronics not of Highline's manufacture are warranted only to the extent of such manufacturer's respective Limited Warranty if any.
14. Wear components.

PARTS WARRANTY

Parts replaced in the warranty period will receive the balance of the one year New Equipment Limited Warranty.

Replacement parts after the original machine warranty are warranted to be free from defects of material for ninety (90) days or the part will be repaired or replaced, without Labour coverage for removal and reinstallation.

EXCLUSION OF WARRANTIES

UNLESS OTHERWISE REQUIRED BY LAW, AND EXCEPT FOR THE WARRANTIES EXPRESSLY AND SPECIFICALLY MADE HEREIN, HIGHLINE MAKES NO OTHER WARRANTIES, AND ANY POSSIBLE LIABILITY OF HIGHLINE HEREIN UNDER IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OF MERCHANT ABILITY OR FITNESS FOR A PARTICULAR PURPOSE. HIGHLINE RESERVES THE RIGHT TO MODIFY, ALTER AND IMPROVE ANY PRODUCT WITHOUT INCURRING ANY OBLIGATION TO REPLACE ANY PRODUCT PREVIOUSLY SOLD WITH SUCH MODIFICATION. NO PERSON IS AUTHORIZED TO GIVE ANY OTHER WARRANTY, OR TO ASSUME ANY ADDITIONAL OBLIGATION ON HIGHLINE'S BEHALF.

AMX520T Extended Service and Warranty Policy

Highline Manufacturing (referred to hereafter as Highline) warrants its new, unused, Agricultural Equipment to be free of defects in material and workmanship at time of the delivery according to the Highline New Equipment Limited Warranty Policy found at the end of each product manual. In exception to this Highline offers the supplemental information below:

1) 3-YEAR LIMITED EXTENDED WARRANTY REPAIR PERIOD

- 1st Year: Highline will repair or replace, at its option, without charge for parts or labor, any defective part of the equipment for a period of twelve (12) months from the warranty start date to the first retail purchaser (see base warranty policy).
- 2nd Year: Highline will repair or replace, at its option, without charge for parts, any Highline Manufactured Part that is found to be defective for the period of thirteen (13) months to twenty-four (24) months from the warranty start date to the first retail purchaser.
- 3rd year: Highline will repair or replace, at its option, for a charge of 50% of the parts, any Highline Manufactured Part that is found to be defective for the period of twenty-five (25) months to thirty-six (36) months from the warranty start date to the first retail purchaser.

NOTE: A Highline Manufactured Part is any part which has been manufactured by Highline Manufacturing. Parts purchased from an outside supplier are not considered to be manufactured by Highline. Purchased parts would include roller chain, hydraulic motors, hydraulic cylinders, bearings etc.

Any parts that are covered by an Extended Warranty published by Highline are an exception to the Basic Policy and are to be warranted as per the details of the Extended Warranty document. The Extended Warranty policy may change from time to time without prior notice from Highline.

2) SUPPLEMENTAL EXTENDED WARRANTY

- Mechanical mixer gearbox drive units: Highline will repair or replace, at its option, without charge for parts or labor, any defective mixer drive gearbox and/or components for a period of 24 months from the warranty start date to the first retail purchaser. The mixer drive gearbox will be warranted against any defects in material and/or workmanship under normal use and while being maintained in accordance with the Operator manual or supplemental instructions. This supplemental warranty will require the submission of oil samples.

3) EXCEPTIONS TO THIS WARRANTY

- In no event shall the owner be entitled to recover costs for incidental, special or consequential damages such as, but not limited to: loss of profit or revenue, other commercial losses or inconvenience.
- Repair, Maintenance, and Service items not related to defects:
 1. Loss or damage during shipment.
 2. Failure resulting from lack of or improper maintenance.
 3. Damage caused by operator abuse, negligence, or improper operation.
 4. Non-defective items replaced due to customer demand unless authorized by the Highline Service Department.
 5. Non-reimbursable maintenance items including but not limited to oil, grease, chains, etc.
 6. Any and all costs for repairs or replacement of parts not shown to be defective.
 7. Damage due to accidents.

This Page Left Blank